

BID TABULATION FOR:

CONSTRUCTION OF THE PAVING AND APPURTENANCES
TO SERVE SIENNA SECTION 69B
SIENNA MUNICIPAL UTILITY DISTRICT NO. 6
CITY OF MISSOURI CITY, FORT BEND COUNTY, TEXAS
FEBRUARY 13, 2025
LJA ENGINEERING, INC.
C CORTEZ
FEBRUARY 13, 2025
1416-1569BP (9.2)

BID OPENING DATE:

BID OPENING LOCATION:


TABULATION BY:

TABULATION DATE:

LJA JOB NO.

BIDDER NAME	BASE BID	ALTERNATE BID NO. 1 PLUS BASE BID
1) MB WESTERN CONSTRUCTION	\$902,856.80	\$974,358.80
2) ELITE CONSTRUCTION AND ENGINEERING SERVICES, LLC	\$940,000.00	\$1,080,968.50
3) MH2 CONSTRUCTION SERVICES, LLC	\$943,498.00	\$1,015,000.00
4) R CONSTRUCTION CIVIL, LLC	\$1,004,440.00	\$1,178,137.00
5) NORTHTEX CONSTRUCTION, LLC	\$1,053,018.75	\$1,124,520.75

60/70



Tyler Volk
2/13/2025

Tyler Volk

I, TYLER VOLK, P.E., hereby certify these bid tabulations to be true and correct.

BID TABULATION FOR:

BID OPENING DATE:
 BID OPENING LOCATION:
 TABULATION BY:
 TABULATION DATE:
 LJA JOB NO.

CONSTRUCTION OF THE PAVING AND APPURTENANCES
 TO SERVE SIENNA SECTION 69B
 SIENNA MUNICIPAL UTILITY DISTRICT NO. 6
 CITY OF MISSOURI CITY, FORT BEND COUNTY, TEXAS
 FEBRUARY 13, 2025
 LJA ENGINEERING, INC.
 C CORTEZ
 FEBRUARY 13, 2025
 1416-1569BP (9.2)

NO.	ITEM DESCRIPTION	UNIT	QTY	1) MB WESTERN CONSTRUCTION		2) ELITE CONSTRUCTION AND ENGINEERING SERVICES, LLC		3) MH2 CONSTRUCTION SERVICES, LLC		4) R CONSTRUCTION CIVIL, LLC	
				UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
BASE BID PAVING IMPROVEMENT ITEMS (INTERNAL) - (SIENNA MUD NO. 6)											
1.	METHOD "A" CONSTRUCTION STAKING BY THE CONTRACTOR PER JON BORDOVSKY, GBI PARTNERS, LP, 281.499.4539, COMPLETE IN PLACE	LS	1	\$5,865.00	\$5,865.00	\$6,500.00	\$6,500.00	\$5,865.00	\$5,865.00	\$5,865.00	\$5,865.00
2.	AS BUILT CONSTRUCTION STAKING BY THE CONTRACTOR PER JON BORDOVSKY, GBI PARTNERS, LP, 281.499.4539	LS	1	\$3,500.00	\$3,500.00	\$4,500.00	\$4,500.00	\$3,500.00	\$3,500.00	\$3,500.00	\$3,500.00
3.	6" REINFORCED CONCRETE PAVEMENT POURED FULL-WIDTH WHERE APPLICABLE, (MISSOURI CITY SPECIFICATIONS), COMPLETE IN PLACE	SY	10000	\$52.00	\$520,000.00	\$52.00	\$520,000.00	\$53.53	\$535,300.00	\$55.00	\$550,000.00
4.	4" X 12" REINFORCED MOUNTABLE CURB WITH POLYETHYLENE FIBERS, (MISSOURI CITY SPECIFICATIONS), COMPLETE IN PLACE	LF	3634	\$4.30	\$15,626.20	\$3.40	\$12,355.60	\$4.18	\$15,190.12	\$5.00	\$18,170.00
5.	6" REINFORCED CONCRETE CURB, (MISSOURI CITY SPECIFICATIONS), COMPLETE IN PLACE	LF	2392	\$4.30	\$10,285.60	\$4.80	\$11,481.60	\$4.18	\$9,998.56	\$5.00	\$11,960.00
6.	8" LIME STABILIZED SUBGRADE, (MISSOURI CITY SPECIFICATIONS), COMPLETE IN PLACE	SY	11991	\$4.50	\$53,959.50	\$3.50	\$41,968.50	\$4.51	\$54,079.41	\$7.00	\$83,937.00
7.	LIME FOR SUBGRADE PREPARATION, (8% BY DRY WEIGHT), (44 LBS/SY), (TO BE USED ONLY AS DIRECTED BY THE ENGINEER), COMPLETE IN PLACE	TON	264	\$330.00	\$87,120.00	\$374.00	\$98,736.00	\$362.00	\$95,568.00	\$340.00	\$89,760.00
8.	COMMON ROADWAY EXCAVATION TO BE USED FOR ONSITE FILL, INCLUDES EXCAVATION, HAULING, PLACING AND COMPACTION TO 95% STANDARD PROCTOR DENSITY WITH MAXIMUM 8" LIFTS, COMPLETE IN PLACE	CY	8355	\$3.00	\$25,065.00	\$3.30	\$27,571.50	\$3.98	\$33,252.90	\$5.00	\$41,775.00
9.	PLACEMENT AND COMPACTION OF ON-SITE STOCKPILE TO BE USED FOR ON-SITE FILL TO 95% STANDARD PROCTOR DENSITY WITH MAXIMUM 8" LIFTS, (AS DIRECTED BY ENGINEER), COMPLETE IN PLACE	CY	20879	\$2.50	\$52,197.50	\$3.70	\$77,252.30	\$3.98	\$83,098.42	\$5.00	\$104,395.00
10.	PERMANENT TRAFFIC CONTROL DEVICES, INCLUDING TRAFFIC BUTTONS, STREET SIGNS, STOP SIGNS, PAVEMENT STRIPING, MARKER, ETC., COMPLETE IN PLACE	LS	1	\$4,500.00	\$4,500.00	\$16,940.00	\$16,940.00	\$12,538.00	\$12,538.00	\$9,200.00	\$9,200.00
11.	4" SQUARE DOUBLE REFLECTORIZED BLUE TRAFFIC BUTTON FOR FIRE HYDRANT LOCATION, COMPLETE IN PLACE	EA	9	\$18.00	\$162.00	\$62.00	\$558.00	\$18.00	\$162.00	\$15.00	\$135.00
12.	HAULING AND PLACING OF ONSITE STRIPPING ON LOTS AND RESERVES, COMPLETE IN PLACE	LS	1	\$5,000.00	\$5,000.00	\$13,660.00	\$13,660.00	\$7,988.00	\$7,988.00	\$4,100.00	\$4,100.00
13.	INSTALLATION AND REMOVAL OF STABILIZED CONSTRUCTION EXIT, SWMHCA SPECIFICATION NO. 4711, (TO BE USED ONLY AS DIRECTED BY THE ENGINEER), COMPLETE IN PLACE	EA	1	\$1,500.00	\$1,500.00	\$4,460.00	\$4,460.00	\$1,500.00	\$1,500.00	\$1,500.00	\$1,500.00
14.	CITY OF MISSOURI CITY (COMC) CONSTRUCTION PERMIT FOR CONSTRUCTION OF PAVING OF INTERNAL SECTION, COMPLETE IN PLACE	LS	1	\$10,000.00	\$10,000.00	\$18,400.50	\$18,400.50	\$13,298.00	\$13,298.00	\$9,900.00	\$9,900.00
15.	PROVIDE SUBDIVISION BOND IN THE AMOUNT OF \$217,869.40, COMPLETE IN PLACE	LS	1	\$6,000.00	\$6,000.00	\$8,340.00	\$8,340.00	\$4,857.00	\$4,857.00	\$3,500.00	\$3,500.00
16.	FINAL LOT GRADING OF 90 LOTS AND ADJACENT RESERVES, COMPLETE IN PLACE	LS	1	\$25,000.00	\$25,000.00	\$24,590.00	\$24,590.00	\$26,070.99	\$26,070.99	\$21,000.00	\$21,000.00
17.	IRRIGATION SLEEVE, 6" PVC SCHEDULE 40, INCLUDES RISERS AND ALL OTHER APPURTENANCES, COMPLETE IN PLACE	LF	119	\$40.00	\$4,760.00	\$30.00	\$3,570.00	\$39.20	\$4,664.80	\$55.00	\$6,545.00

BID TABULATION FOR:

BID OPENING DATE:
BID OPENING LOCATION:
TABULATION BY:
TABULATION DATE:
LJA JOB NO.

**CONSTRUCTION OF THE PAVING AND APPURTENANCES
 TO SERVE SIENNA SECTION 69B
 SIENNA MUNICIPAL UTILITY DISTRICT NO. 6
 CITY OF MISSOURI CITY, FORT BEND COUNTY, TEXAS
 FEBRUARY 13, 2025
 LJA ENGINEERING, INC.
 C CORTEZ
 FEBRUARY 13, 2025
 1416-1569BP (9.2)**

NO.	ITEM DESCRIPTION	UNIT	QTY	1) MB WESTERN CONSTRUCTION		2) ELITE CONSTRUCTION AND ENGINEERING SERVICES, LLC		3) MHZ CONSTRUCTION SERVICES, LLC		4) R CONSTRUCTION CIVIL, LLC	
				UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
18.	CONNECT PROPOSED 6" PAVEMENT TO EXISTING 6" PAVEMENT AND DOWEL INTO EXISTING CONCRETE PAVEMENT AND UNDERCUT, AND ANY OTHER APPURTENANCES, COMPLETE IN PLACE	LF	56	\$55.00	\$3,080.00	\$79.00	\$4,424.00	\$58.00	\$3,248.00	\$60.00	\$3,360.00
19.	FORT BEND COUNTY RIGHT OF WAY PERMIT FOR TIE INTO EXISTING RIGHT OF WAY, COMPLETE IN PLACE	LS	1	\$500.00	\$500.00	\$5,470.00	\$5,470.00	\$500.00	\$500.00	\$500.00	\$500.00
20.	PROPOSED TYPE III BARRICADE, COMPLETE IN PLACE	EA	1	\$1,000.00	\$1,000.00	\$1,560.00	\$1,560.00	\$500.00	\$500.00	\$1,200.00	\$1,200.00
21.	WHEELCHAIR RAMPS AS PER COMC DETAIL, ALL SIZES, INCLUDING TRUNCATED DOME PAVER AS NOTED IN CONSTRUCTION PLAN SET, COMPLETE IN PLACE	EA	16	\$1,500.00	\$24,000.00	\$1,797.00	\$28,752.00	\$1,668.00	\$26,688.00	\$2,000.00	\$32,000.00
22.	PAVING HEADER, AS PER CITY OF MISSOURI CITY CRITERIA, COMPLETE IN PLACE	LF	28	\$12.00	\$336.00	\$98.00	\$2,744.00	\$56.00	\$1,568.00	\$30.00	\$840.00
23.	REMOVE AND DISPOSE OF EXISTING TYPE III BARRICADE, COMPLETE IN PLACE	EA	2	\$100.00	\$200.00	\$275.00	\$550.00	\$1.00	\$2.00	\$1.00	\$2.00
24.	CONTRACTOR TO DEMUCK TO 3 FOOT DEPTH AND SCARIFY AND PROOF ROLL EXISTING SWALE, COMPLETE IN PLACE	SY	216	\$200.00	\$43,200.00	\$26.00	\$5,616.00	\$18.80	\$4,060.80	\$6.00	\$1,296.00
SUBTOTAL BASE BID PAVING IMPROVEMENT ITEMS (INTERNAL) - (SIENNA MUD NO. 6)					\$902,856.80		\$940,000.00		\$943,498.00		\$1,004,440.00
BASE BID MISCELLANEOUS ITEMS											
1.	STANDARD DEDUCT FOR VARIANCE REQUESTS SUBMITTED BY THE ENGINEER ON BEHALF OF THE CONTRACTOR, (TO BE USED ONLY AS DIRECTED BY THE ENGINEER), COMPLETE IN PLACE	EA	0	-\$1,000.00	\$0.00	-\$1,000.00	\$0.00	-\$1,000.00	\$0.00	-\$1,000.00	\$0.00
2.	STANDARD DEDUCT FOR STREET CLEANING (AS DIRECTED BY THE OWNER), COMPLETE IN PLACE	HR	0	-\$125.00	\$0.00	-\$125.00	\$0.00	-\$125.00	\$0.00	-\$125.00	\$0.00
3.	STANDARD DEDUCT FOR DAMAGE TO WETLANDS FENCING BY THE CONTRACTOR, (AS DIRECTED BY THE ENGINEER), COMPLETE IN PLACE	LF	0	-\$10.00	\$0.00	-\$10.00	\$0.00	-\$10.00	\$0.00	-\$10.00	\$0.00
4.	STANDARD DEDUCT FOR DAMAGE TO TREE MARKED FOR PRESERVATION, (TO BE USED ONLY AS DIRECTED BY THE ENGINEER), COMPLETE IN PLACE	EA	0	-\$1,000.00	\$0.00	-\$1,000.00	\$0.00	-\$1,000.00	\$0.00	-\$1,000.00	\$0.00
5.	FORT BEND COUNTY CONSTRUCTION COMPLETION AND FINAL ACCEPTANCE INSPECTION FEES, COMPLETE IN PLACE	EA	0	-\$500.00	\$0.00	-\$500.00	\$0.00	-\$500.00	\$0.00	-\$500.00	\$0.00
SUBTOTAL BASE BID MISCELLANEOUS ITEMS					\$0.00		\$0.00		\$0.00		\$0.00
ALTERNATE BID NO. 1 FIELD CONDITIONS ITEMS											
1.	ADDITIONAL 8" LIME STABILIZED SUBGRADE (MISSOURI CITY SPECIFICATIONS) TO BE USED FOR UNSTABLE SOIL CONDITIONS AS DIRECTED BY THE ENGINEER, COMPLETE IN PLACE	SY	11991	\$2.00	\$23,982.00	\$3.50	\$41,968.50	\$2.00	\$23,982.00	\$7.00	\$83,937.00
2.	ADDITIONAL LIME FOR SUBGRADE PREPARATION (8% BY WEIGHT) (44 LBS/YD), TO BE USED FOR UNSTABLE SOIL CONDITIONS AS DIRECTED BY THE ENGINEER, COMPLETE IN PLACE	TON	264	\$180.00	\$47,520.00	\$375.00	\$99,000.00	\$180.00	\$47,520.00	\$340.00	\$89,760.00
SUBTOTAL ALTERNATE BID NO. 1 FIELD CONDITIONS ITEMS					\$71,502.00		\$140,968.50		\$71,502.00		\$173,697.00

BID TABULATION FOR:

BID OPENING DATE:
BID OPENING LOCATION:
TABULATION BY:
TABULATION DATE:
LJA JOB NO.

**CONSTRUCTION OF THE PAVING AND APPURTENANCES
 TO SERVE SIENNA SECTION 69B
 SIENNA MUNICIPAL UTILITY DISTRICT NO. 6
 CITY OF MISSOURI CITY, FORT BEND COUNTY, TEXAS
 FEBRUARY 13, 2025
 LJA ENGINEERING, INC.
 C CORTEZ
 FEBRUARY 13, 2025
 1416-1569BP (9.2)**

NO.	ITEM DESCRIPTION	UNIT	QTY	1) MB WESTERN CONSTRUCTION		2) ELITE CONSTRUCTION AND ENGINEERING SERVICES, LLC		3) MH2 CONSTRUCTION SERVICES, LLC		4) R CONSTRUCTION CIVIL, LLC	
				UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
BID SUMMARY											
	BASE BID PAVING IMPROVEMENT ITEMS (INTERNAL) - (SIENNA MUD NO. 6)				\$902,856.80		\$940,000.00		\$943,498.00		\$1,004,440.00
	BASE BID MISCELLANEOUS ITEMS				\$0.00		\$0.00		\$0.00		\$0.00
	TOTAL AMOUNT BASE BID				\$902,856.80		\$940,000.00		\$943,498.00		\$1,004,440.00
ALTERNATE BID NO. 1											
	TOTAL AMOUNT BASE BID				\$902,856.80		\$940,000.00		\$943,498.00		\$1,004,440.00
	FIELD CONDITIONS ITEMS				\$71,502.00		\$140,968.50		\$71,502.00		\$173,697.00
	TOTAL ALTERNATE BID NO. 1 PLUS BASE BID				\$974,358.80		\$1,080,968.50		\$1,015,000.00		\$1,178,137.00

LJA Engineering, Inc.

BID TABULATION FOR:

BID OPENING DATE:
BID OPENING LOCATION:
TABULATION BY:
TABULATION DATE:
LJA JOB NO.

**CONSTRUCTION OF THE PAVING AND APPURTENANCES
 TO SERVE SIENNA SECTION 698
 SIENNA MUNICIPAL UTILITY DISTRICT NO. 6
 CITY OF MISSOURI CITY, FORT BEND COUNTY, TEXAS
 FEBRUARY 13, 2025
 LJA ENGINEERING, INC.
 C CORTEZ
 FEBRUARY 13, 2025
 1416-15698P (9.2)**


S) NORTHTEX CONSTRUCTION, LLC					
NO.	ITEM DESCRIPTION	UNIT	QTY	UNIT COST	TOTAL
BASE BID PAVING IMPROVEMENT ITEMS (INTERNAL) - (SIENNA MUD NO. 6)					
1.	METHOD "A" CONSTRUCTION STAKING BY THE CONTRACTOR PER JON BORDOVSKY, GBI PARTNERS, LP, 281.499.4539, COMPLETE IN PLACE	LS	1	\$5,865.00	\$5,865.00
2.	AS BUILT CONSTRUCTION STAKING BY THE CONTRACTOR PER JON BORDOVSKY, GBI PARTNERS, LP, 281.499.4539	LS	1	\$3,500.00	\$3,500.00
3.	6" REINFORCED CONCRETE PAVEMENT POURED FULL-WIDTH WHERE APPLICABLE, (MISSOURI CITY SPECIFICATIONS), COMPLETE IN PLACE	SY	10000	\$57.00	\$570,000.00
4.	4" X 12" REINFORCED MOUNTABLE CURB WITH POLYETHYLENE FIBERS, (MISSOURI CITY SPECIFICATIONS), COMPLETE IN PLACE	LF	3634	\$5.05	\$18,351.70
5.	6" REINFORCED CONCRETE CURB, (MISSOURI CITY SPECIFICATIONS), COMPLETE IN PLACE	LF	2392	\$5.05	\$12,079.60
6.	8" LIME STABILIZED SUBGRADE, (MISSOURI CITY SPECIFICATIONS), COMPLETE IN PLACE	SY	11991	\$4.15	\$49,762.65
7.	LIME FOR SUBGRADE PREPARATION, (8% BY DRY WEIGHT), (44 LBS/SY), (TO BE USED ONLY AS DIRECTED BY THE ENGINEER), COMPLETE IN PLACE	TON	264	\$395.00	\$104,280.00
8.	COMMON ROADWAY EXCAVATION TO BE USED FOR ONSITE FILL, INCLUDES EXCAVATION, HAULING, PLACING AND COMPACTION TO 95% STANDARD PROCTOR DENSITY WITH MAXIMUM 8" LIFTS, COMPLETE IN PLACE	CY	8355	\$6.50	\$54,307.50
9.	PLACEMENT AND COMPACTION OF ON-SITE STOCKPILE TO BE USED FOR ONSITE FILL TO 95% STANDARD PROCTOR DENSITY WITH MAXIMUM 8" LIFTS, (AS DIRECTED BY ENGINEER), COMPLETE IN PLACE	CY	20879	\$6.20	\$129,449.80
10.	PERMANENT TRAFFIC CONTROL DEVICES, INCLUDING TRAFFIC BUTTONS, STREET SIGNS, STOP SIGNS, PAVEMENT STRIPING, MARKER, ETC., COMPLETE IN PLACE	LS	1	\$7,550.00	\$7,550.00
11.	4" SQUARE DOUBLE REFLECTORIZED BLUE TRAFFIC BUTTON FOR FIRE HYDRANT LOCATION, COMPLETE IN PLACE	EA	9	\$12.50	\$112.50
12.	HAULING AND PLACING OF ONSITE STRIPPING ON LOTS AND RESERVES, COMPLETE IN PLACE	LS	1	\$6,350.00	\$6,350.00
13.	INSTALLATION AND REMOVAL OF STABILIZED CONSTRUCTION EXIT, SWMHCA SPECIFICATION NO. 4711, (TO BE USED ONLY AS DIRECTED BY THE ENGINEER), COMPLETE IN PLACE	EA	1	\$4,150.00	\$4,150.00
14.	CITY OF MISSOURI CITY (COMC) CONSTRUCTION PERMIT FOR CONSTRUCTION OF PAVING OF INTERNAL SECTION, COMPLETE IN PLACE	LS	1	\$17,000.00	\$17,000.00
15.	PROVIDE SUBDIVISION BOND IN THE AMOUNT OF \$217,869.40, COMPLETE IN PLACE	LS	1	\$6,300.00	\$6,300.00
16.	FINAL LOT GRADING OF 90 LOTS AND ADJACENT RESERVES, COMPLETE IN PLACE	LS	1	\$18,000.00	\$18,000.00
17.	IRRIGATION SLEEVE, 6" PVC SCHEDULE 40, INCLUDES RISERS AND ALL OTHER APPURTENANCES, COMPLETE IN PLACE	LF	119	\$32.00	\$3,808.00

BID TABULATION FOR:

BID OPENING DATE:
BID OPENING LOCATION:
TABULATION BY:
TABULATION DATE:
LJA JOB NO.

**CONSTRUCTION OF THE PAVING AND APPURTENANCES
 TO SERVE SIENNA SECTION 69B
 SIENNA MUNICIPAL UTILITY DISTRICT NO. 6
 CITY OF MISSOURI CITY, FORT BEND COUNTY, TEXAS
 FEBRUARY 13, 2025
 LJA ENGINEERING, INC.
 C CORTEZ
 FEBRUARY 13, 2025
 1416-15698P (9.2)**

5) NORTHTEX CONSTRUCTION, LLC					
NO.	ITEM DESCRIPTION	UNIT	QTY	UNIT COST	TOTAL
18.	CONNECT PROPOSED 6" PAVEMENT TO EXISTING 6" PAVEMENT AND DOWEL INTO EXISTING CONCRETE PAVEMENT AND UNDERCUT, AND ANY OTHER APPURTENANCES, COMPLETE IN PLACE	LF	56	\$60.00	\$3,360.00
19.	FORT BEND COUNTY RIGHT OF WAY PERMIT FOR TIE INTO EXISTING RIGHT OF WAY, COMPLETE IN PLACE	LS	1	\$500.00	\$500.00
20.	PROPOSED TYPE III BARRICADE, COMPLETE IN PLACE	EA	1	\$1,500.00	\$1,500.00
21.	WHEELCHAIR RAMPS AS PER COMC DETAIL, ALL SIZES, INCLUDING TRUNCATED DOME PAVER AS NOTED IN CONSTRUCTION PLAN SET, COMPLETE IN PLACE	EA	16	\$1,800.00	\$28,800.00
22.	PAVING HEADER, AS PER CITY OF MISSOURI CITY CRITERIA, COMPLETE IN PLACE	LF	28	\$51.00	\$1,428.00
23.	REMOVE AND DISPOSE OF EXISTING TYPE III BARRICADE, COMPLETE IN PLACE	EA	2	\$150.00	\$300.00
24.	CONTRACTOR TO DEMUCK TO 3 FOOT DEPTH AND SCARIFY AND PROOF ROLL EXISTING SWALE, COMPLETE IN PLACE	SY	216	\$29.00	\$6,264.00
SUBTOTAL BASE BID PAVING IMPROVEMENT ITEMS (INTERNAL) - (SIENNA MUD NO. 6)					\$1,053,018.75
BASE BID MISCELLANEOUS ITEMS					
1.	STANDARD DEDUCT FOR VARIANCE REQUESTS SUBMITTED BY THE ENGINEER ON BEHALF OF THE CONTRACTOR, (TO BE USED ONLY AS DIRECTED BY THE ENGINEER), COMPLETE IN PLACE	EA	0	-\$1,000.00	\$0.00
2.	STANDARD DEDUCT FOR STREET CLEANING (AS DIRECTED BY THE OWNER), COMPLETE IN PLACE	HR	0	-\$125.00	\$0.00
3.	STANDARD DEDUCT FOR DAMAGE TO WETLANDS FENCING BY THE CONTRACTOR, (AS DIRECTED BY THE ENGINEER), COMPLETE IN PLACE	LF	0	-\$10.00	\$0.00
4.	STANDARD DEDUCT FOR DAMAGE TO TREE MARKED FOR PRESERVATION, (TO BE USED ONLY AS DIRECTED BY THE ENGINEER), COMPLETE IN PLACE	EA	0	-\$1,000.00	\$0.00
5.	FORT BEND COUNTY CONSTRUCTION COMPLETION AND FINAL ACCEPTANCE INSPECTION FEES, COMPLETE IN PLACE	EA	0	-\$500.00	\$0.00
SUBTOTAL BASE BID MISCELLANEOUS ITEMS					\$0.00
ALTERNATE BID NO. 1 FIELD CONDITIONS ITEMS					
1.	ADDITIONAL 8" LIME STABILIZED SUBGRADE (MISSOURI CITY SPECIFICATIONS) TO BE USED FOR UNSTABLE SOIL CONDITIONS AS DIRECTED BY THE ENGINEER, COMPLETE IN PLACE	SY	11991	\$2.00	\$23,982.00
2.	ADDITIONAL LIME FOR SUBGRADE PREPARATION (8% BY WEIGHT) (44 LBS/YD), TO BE USED FOR UNSTABLE SOIL CONDITIONS AS DIRECTED BY THE ENGINEER, COMPLETE IN PLACE	TON	264	\$180.00	\$47,520.00
SUBTOTAL ALTERNATE BID NO. 1 FIELD CONDITIONS ITEMS					\$71,502.00

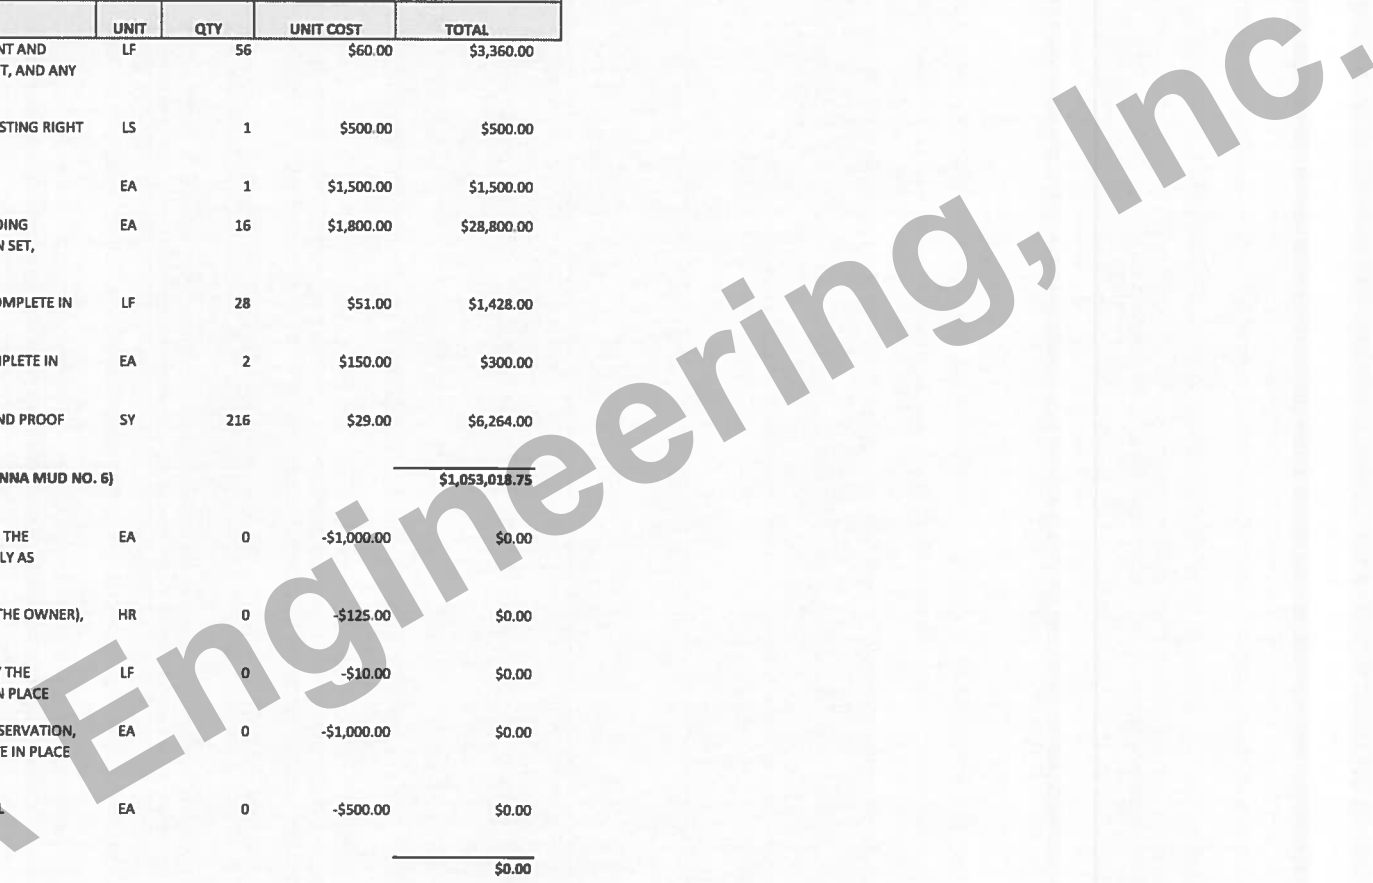

BID TABULATION FOR:

BID OPENING DATE:
BID OPENING LOCATION:
TABULATION BY:
TABULATION DATE:
LJA JOB NO.

**CONSTRUCTION OF THE PAVING AND APPURTENANCES
TO SERVE SIENNA SECTION 69B
SIENNA MUNICIPAL UTILITY DISTRICT NO. 6
CITY OF MISSOURI CITY, FORT BEND COUNTY, TEXAS
FEBRUARY 13, 2025
LJA ENGINEERING, INC.
C CORTEZ
FEBRUARY 13, 2025
1416-1569BP (9.2)**

5) NORTHTEX CONSTRUCTION, LLC				
NO.	ITEM DESCRIPTION	UNIT	QTY	TOTAL
BID SUMMARY				
	BASE BID PAVING IMPROVEMENT ITEMS (INTERNAL) - (SIENNA MUD NO. 6)			\$1,053,018.75
	BASE BID MISCELLANEOUS ITEMS			\$0.00
	TOTAL AMOUNT BASE BID			\$1,053,018.75
ALTERNATE BID NO. 1				
	TOTAL AMOUNT BASE BID			\$1,053,018.75
	FIELD CONDITIONS ITEMS			\$71,502.00
	TOTAL ALTERNATE BID NO. 1 PLUS BASE BID			\$1,124,520.75

LJA Engineering, Inc.