

BID TABULATION FOR:

PAVING AND APPURTENANCES TO SERVE SIENNA SECTION 70


BID OPENING DATE:
BID OPENING LOCATION:
TABULATION BY:
TABULATION DATE:
LJA JOB NO.

SIENNA MUNICIPAL UTILITY DISTRICT NO. 6
CITY OF MISSOURI CITY, FORT BEND COUNTY, TEXAS
MARCH 12, 2026
LJA ENGINEERING, INC.
E. PENA
MARCH 12, 2026
1416-1570P (9.2)

BIDDER NAME	BASE BID	ALTERNATE BID NO. 1 PLUS BASE BID
1) D&J CONSTRUCTION, INC	\$653,449.50	\$700,283.50
2) MH2 CONSTRUCTION SERVICES, LLC	\$658,000.00	\$704,834.00
3) CLEARPAVE, LLC	\$678,166.00	\$725,000.00
4) HARRIS CONSTRUCTION COMPANY, LLC	\$685,781.80	\$732,615.80
5) R CONSTRUCTION CIVIL, LLC	\$742,199.00	\$789,033.00
6) GMR TOTAL SERVICES, LLC	\$757,668.25	\$804,502.25
7) DECROSTA CONSTRUCTION	\$798,423.89	\$894,686.89
8) PRINCIPAL PAVING CONTRACTORS, LTD	\$824,117.20	\$870,951.20

CALENDAR DAYS - 50/10

LJA Engineering, Inc

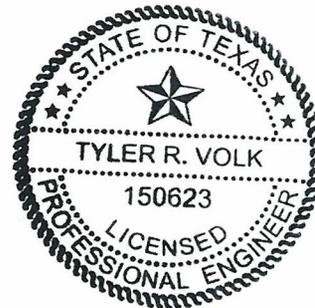

Tyler Volk
3/12/2026

For *Tyler Volk*

I, Richard Stanfield, P.E., hereby certify these bid tabulations to be true and correct.

BID TABULATION FOR:

PAVING AND APPURTENANCES TO SERVE SIENNA SECTION 70

BID OPENING DATE:
 BID OPENING LOCATION:
 TABULATION BY:
 TABULATION DATE:
 LIA JOB NO.

SIENNA MUNICIPAL UTILITY DISTRICT NO. 6
 CITY OF MISSOURI CITY, FORT BEND COUNTY, TEXAS
 MARCH 12, 2026
 LJA ENGINEERING, INC.
 E. PENA
 MARCH 12, 2026
 1416-1570P (9.2)

NO.	ITEM DESCRIPTION	UNIT	QTY	1) D&J CONSTRUCTION, INC		2) MH2 CONSTRUCTION SERVICES, LLC		3) CLEARPAVE, LLC		4) HARRIS CONSTRUCTION COMPANY, LLC	
				UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
BASE BID PAVING IMPROVEMENT ITEMS (INTERNAL) - (SIENNA MUD NO. 6)											
1.	METHOD "A" CONSTRUCTION STAKING BY THE CONTRACTOR PER JON BORDOVSKY, GBI PARTNERS, LP, 281.499.4539, COMPLETE IN PLACE	LS	1	\$7,000.00	\$7,000.00	\$6,998.00	\$6,998.00	\$6,998.00	\$6,998.00	\$8,641.00	\$8,641.00
2.	AS BUILT CONSTRUCTION STAKING BY THE CONTRACTOR PER JON BORDOVSKY, GBI PARTNERS, LP, 281.499.4539, COMPLETE IN PLACE	LS	1	\$2,500.00	\$2,500.00	\$2,500.00	\$2,500.00	\$2,500.00	\$2,500.00	\$3,500.00	\$3,500.00
3.	6" REINFORCED CONCRETE PAVEMENT, COMPLETE IN PLACE	SY	6607	\$51.00	\$336,957.00	\$45.58	\$301,147.06	\$50.75	\$335,305.25	\$50.00	\$330,350.00
4.	4" X 12" REINFORCED CONCRETE CURB, COMPLETE IN PLACE	LF	2140	\$4.00	\$8,560.00	\$3.68	\$7,875.20	\$5.00	\$10,700.00	\$3.60	\$7,704.00
5.	6" REINFORCED CONCRETE CURB, COMPLETE IN PLACE	LF	1528	\$4.00	\$6,112.00	\$3.68	\$5,623.04	\$5.00	\$7,640.00	\$3.60	\$5,500.80
6.	8" LIME STABILIZED SUBGRADE, (MISSOURI CITY SPECIFICATIONS), COMPLETE IN PLACE	SY	7847	\$3.50	\$27,464.50	\$3.98	\$31,231.06	\$4.00	\$31,388.00	\$2.80	\$21,971.60
7.	LIME FOR 8" STABILIZED SUBGRADE PREPARATION, 8% BY DRY WEIGHT (44 LBS/SY), AS REQUIRED BY SOIL CONDITIONS AND APPROVED BY GEOTECHNICAL ENGINEER, COMPLETE IN PLACE	TON	173	\$370.00	\$64,010.00	\$358.08	\$61,947.84	\$375.00	\$64,875.00	\$375.00	\$64,875.00
8.	ROADWAY EXCAVATION TO BE USED FOR FILL TO FINAL GRADE WITHIN THE PROJECT LIMITS, INCLUDES STRIPPING, STOCKPILING STRIPPINGS, EXCAVATION, PLACEMENT AND COMPACTION TO 95% STANDARD PROCTOR DENSITY, WITH MAXIMUM 8" LIFTS, AND RE-APPLICATION OF STRIPPINGS, COMPLETE IN PLACE	CY	14530	\$3.00	\$43,590.00	\$4.82	\$70,034.60	\$3.50	\$50,855.00	\$3.00	\$43,590.00
9.	EXCAVATION, HAULING, PLACEMENT AND COMPACTION OF EXCAVATION SPOILS TO BE HAULED USING ON-ROAD TRUCKS TO BE HAULED TO FILL SITE "A", WITHIN 4 MILES OF THE PROJECT, PLACED AND COMPACTED TO 95% STANDARD PROCTOR DENSITY WITH MAXIMUM 8" LIFTS, AS PER GEOTECHNICAL ENGINEER'S RECOMMENDATION, COMPLETE IN PLACE	CY	10084	\$7.00	\$70,588.00	\$6.18	\$62,319.12	\$7.25	\$73,109.00	\$7.95	\$80,167.80
10.	PERMANENT TRAFFIC CONTROL DEVICES, INCLUDES ALL TRAFFIC BUTTONS, PAVEMENT STRIPING, MARKERS, REFLECTIVE PAINT ON MEDIAN NOSES, STREET SIGNS, TRAFFIC SIGNS, ETC., COMPLETE IN PLACE	LS	1	\$5,000.00	\$5,000.00	\$5,978.00	\$5,978.00	\$3,500.00	\$3,500.00	\$7,500.00	\$7,500.00
11.	4" SQUARE DOUBLE REFLECTORIZED BLUE TRAFFIC BUTTON FOR FIRE HYDRANT LOCATION, COMPLETE IN PLACE	EA	7	\$15.00	\$105.00	\$18.18	\$127.26	\$25.00	\$175.00	\$19.00	\$133.00
12.	HAULING AND PLACING OF ONSITE STRIPPING ON LOTS AND RESERVES, COMPLETE IN PLACE	LS	1	\$1,500.00	\$1,500.00	\$1,788.00	\$1,788.00	\$1,500.00	\$1,500.00	\$1,500.00	\$1,500.00
13.	INSTALL, MAINTAIN, AND REMOVE STABILIZED CONSTRUCTION EXIT, AND REGRADE AREA TO MATCH FINISHED GRADE, COMPLETE IN PLACE	EA	1	\$1,500.00	\$1,500.00	\$1,500.00	\$1,500.00	\$1,500.00	\$1,500.00	\$1,500.00	\$1,500.00
14.	CITY OF MISSOURI CITY CONSTRUCTION PERMIT, COMPLETE IN PLACE	LS	1	\$7,500.00	\$7,500.00	\$13,762.06	\$13,762.06	\$12,500.00	\$12,500.00	\$14,000.00	\$14,000.00
15.	PROVIDE SUBDIVISION BOND IN THE AMOUNT OF \$126,711.90, COMPLETE IN PLACE	LS	1	\$3,650.00	\$3,650.00	\$4,602.06	\$4,602.06	\$2,910.72	\$2,910.72	\$12,500.00	\$12,500.00

BID TABULATION FOR:

PAVING AND APPURTENANCES TO SERVE SIENNA SECTION 70

BID OPENING DATE:
 BID OPENING LOCATION:
 TABULATION BY:
 TABULATION DATE:
 LJA JOB NO.

SIENNA MUNICIPAL UTILITY DISTRICT NO. 6
 CITY OF MISSOURI CITY, FORT BEND COUNTY, TEXAS
 MARCH 12, 2026
 LJA ENGINEERING, INC.
 E. PENA
 MARCH 12, 2026
 1416-1570P (9.2)

NO.	ITEM DESCRIPTION	UNIT	QTY	1) D&J CONSTRUCTION, INC		2) MH2 CONSTRUCTION SERVICES, LLC		3) CLEARPAVE, LLC		4) HARRIS CONSTRUCTION COMPANY, LLC	
				UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
16.	FINAL LOT GRADING OF 92 LOTS AND ADJACENT RESERVES, COMPLETE IN PLACE	LS	1	\$10,000.00	\$10,000.00	\$20,928.00	\$20,928.00	\$15,000.00	\$15,000.00	\$21,425.00	\$21,425.00
17.	6" PVC IRRIGATION SLEEVE, SCHEDULE 40, INCLUDES RISERS, PVC END CAPS, CEMENT STABILIZED SAND BACKFILL AND MARKERS, COMPLETE IN PLACE	LF	300	\$35.00	\$10,500.00	\$34.28	\$10,284.00	\$35.00	\$10,500.00	\$40.00	\$12,000.00
18.	CONNECT PROPOSED 6" PAVEMENT TO EXISTING 6" PAVEMENT AND DOWEL INTO EXISTING CONCRETE PAVEMENT AND UNDERCUT, AND ANY OTHER APPURTENANCES, COMPLETE IN PLACE	LF	84	\$15.00	\$1,260.00	\$57.80	\$4,855.20	\$15.00	\$1,260.00	\$22.90	\$1,923.60
19.	ADA RAMPS, INCLUDES TRUNCATED DOME PAVERS WITH CONTRASTING COLOR PER DETAIL, COMPLETE IN PLACE	EA	6	\$1,200.00	\$7,200.00	\$1,258.00	\$7,548.00	\$1,500.00	\$9,000.00	\$1,575.00	\$9,450.00
20.	REMOVE AND OFFSITE DISPOSAL OF EXISTING TYPE III BARRICADE, COMPLETE IN PLACE	EA	3	\$1.00	\$3.00	\$0.50	\$1.50	\$0.01	\$0.03	\$200.00	\$600.00
21.	FORT BEND COUNTY RIGHT OF WAY PERMIT FOR TIE INTO EXISTING RIGHT OF WAY, COMPLETE IN PLACE	LS	1	\$1,000.00	\$1,000.00	\$500.00	\$500.00	\$500.00	\$500.00	\$500.00	\$500.00
22.	FORT BEND COUNTY DEVELOPMENT PERMIT FOR PLACING AND COMPACTING SPOILS, COMPLETE IN PLACE	LS	1	\$1,000.00	\$1,000.00	\$500.00	\$500.00	\$500.00	\$500.00	\$500.00	\$500.00
23.	FORT BEND COUNTY DRIVEWAY PERMIT FOR HAULING SPOILS ON SIENNA PARKWAY, COMPLETE IN PLACE	LS	1	\$1,000.00	\$1,000.00	\$500.00	\$500.00	\$500.00	\$500.00	\$500.00	\$500.00
24.	ADJUSTMENT TO CENTERPOINT UTILITIES, COMPLETE IN PLACE	LS	1	\$35,450.00	\$35,450.00	\$35,450.00	\$35,450.00	\$35,450.00	\$35,450.00	\$35,450.00	\$35,450.00
SUBTOTAL BASE BID PAVING IMPROVEMENT ITEMS (INTERNAL) - (SIENNA MUD NO. 6)					\$653,449.50		\$658,000.00		\$678,166.00		\$685,781.80
BASE BID MISCELLANEOUS ITEMS											
1.	STANDARD DEDUCT FOR VARIANCE REQUESTS SUBMITTED BY THE ENGINEER ON BEHALF OF THE CONTRACTOR, (AS DIRECTED BY ENGINEER), COMPLETE IN PLACE	EA	0	-\$1,000.00	\$0.00	-\$1,000.00	\$0.00	-\$1,000.00	\$0.00	-\$1,000.00	\$0.00
2.	STANDARD DEDUCT FOR STREET CLEANING (AS DIRECTED BY ENGINEER), COMPLETE IN PLACE	HR	0	-\$125.00	\$0.00	-\$125.00	\$0.00	-\$125.00	\$0.00	-\$125.00	\$0.00
3.	WETLANDS CROSSING FOR TEMPORARY ACCESS ROAD, INCLUDES MATTING, COMPLETE IN PLACE	EA	0	-\$10.00	\$0.00	-\$10.00	\$0.00	-\$10.00	\$0.00	-\$10.00	\$0.00
4.	STANDARD DEDUCT FOR DAMAGE TO A TREE MARKED FOR PRESERVATION, COMPLETE IN PLACE	EA	0	-\$1,000.00	\$0.00	-\$1,000.00	\$0.00	-\$1,000.00	\$0.00	-\$1,000.00	\$0.00
5.	FORT BEND COUNTY CONSTRUCTION COMPLETION AND FINAL ACCEPTANCE INSPECTION FEES, COMPLETE IN PLACE	EA	0	-\$500.00	\$0.00	-\$500.00	\$0.00	-\$500.00	\$0.00	-\$500.00	\$0.00
SUBTOTAL BASE BID MISCELLANEOUS ITEMS					\$0.00		\$0.00		\$0.00		\$0.00
ALTERNATE BID NO. 1 FIELD CONDITIONS ITEMS											
1.	ADDITIONAL 8" LIME STABILIZED SUBGRADE (MISSOURI CITY SPECIFICATIONS) TO BE USED FOR UNSTABLE SOIL CONDITIONS AS DIRECTED BY THE ENGINEER, COMPLETE IN PLACE	SY	7847	\$2.00	\$15,694.00	\$2.00	\$15,694.00	\$2.00	\$15,694.00	\$2.00	\$15,694.00


BID TABULATION FOR:

PAVING AND APPURTENANCES TO SERVE SIENNA SECTION 70

BID OPENING DATE:
BID OPENING LOCATION:
TABULATION BY:
TABULATION DATE:
LJA JOB NO.

SIENNA MUNICIPAL UTILITY DISTRICT NO. 6
CITY OF MISSOURI CITY, FORT BEND COUNTY, TEXAS
MARCH 12, 2026
LJA ENGINEERING, INC.
E. PENA
MARCH 12, 2026
1416-1570P (9.2)

NO.	ITEM DESCRIPTION	UNIT	QTY	1) D&J CONSTRUCTION, INC		2) MH2 CONSTRUCTION SERVICES, LLC		3) CLEARPAVE, LLC		4) HARRIS CONSTRUCTION COMPANY, LLC	
				UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
	2. LIME FOR 8" STABILIZED SUBGRADE PREPARATION, 8% BY DRY WEIGHT (44 LBS/SY), AS REQUIRED BY SOIL CONDITIONS AND APPROVED BY GEOTECHNICAL ENGINEER, COMPLETE IN PLACE	TON	173	\$180.00	\$31,140.00	\$180.00	\$31,140.00	\$180.00	\$31,140.00	\$180.00	\$31,140.00
SUBTOTAL ALTERNATE BID NO. 1 FIELD CONDITIONS ITEMS					\$46,834.00		\$46,834.00		\$46,834.00		\$46,834.00
BID SUMMARY											
BASE BID PAVING IMPROVEMENT ITEMS (INTERNAL) - (SIENNA MUD NO. 6)					\$653,449.50		\$658,000.00		\$678,166.00		\$685,781.80
BASE BID MISCELLANEOUS ITEMS					\$0.00		\$0.00		\$0.00		\$0.00
TOTAL AMOUNT BASE BID					\$653,449.50		\$658,000.00		\$678,166.00		\$685,781.80
ALTERNATE BID NO. 1											
TOTAL AMOUNT BASE BID					\$653,449.50		\$658,000.00		\$678,166.00		\$685,781.80
FIELD CONDITIONS ITEMS					\$46,834.00		\$46,834.00		\$46,834.00		\$46,834.00
TOTAL ALTERNATE BID NO. 1 PLUS BASE BID					\$700,283.50		\$704,834.00		\$725,000.00		\$732,615.80

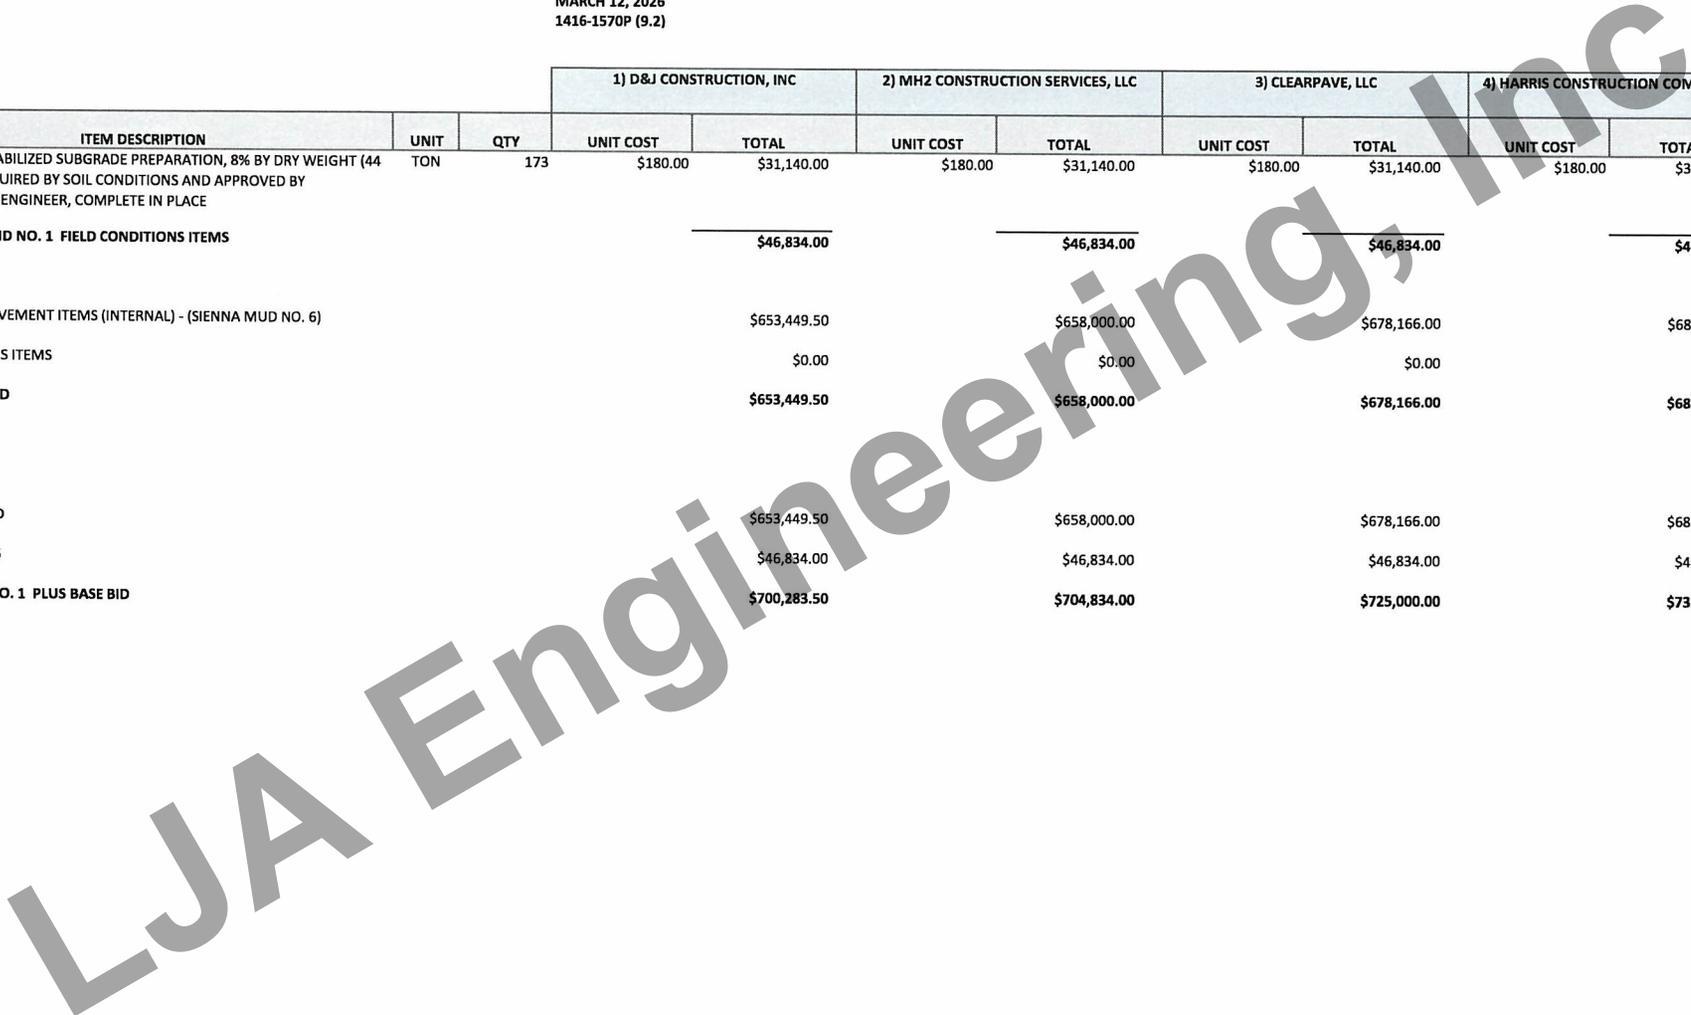

BID TABULATION FOR:

PAVING AND APPURTENANCES TO SERVE SIENNA SECTION 70

BID OPENING DATE:
 BID OPENING LOCATION:
 TABULATION BY:
 TABULATION DATE:
 LIA JOB NO.

SIENNA MUNICIPAL UTILITY DISTRICT NO. 6
 CITY OF MISSOURI CITY, FORT BEND COUNTY, TEXAS
 MARCH 12, 2026
 LJA ENGINEERING, INC.
 E. PENA
 MARCH 12, 2026
 1416-1570P (9.2)

NO.	ITEM DESCRIPTION	UNIT	QTY	5) R CONSTRUCTION CIVIL, LLC		6) GMR TOTAL SERVICES, LLC		7) DECROSTA CONSTRUCTION		8) PRINCIPAL PAVING CONTRACTORS, LTD	
				UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
BASE BID PAVING IMPROVEMENT ITEMS (INTERNAL) - (SIENNA MUD NO. 6)											
1.	METHOD "A" CONSTRUCTION STAKING BY THE CONTRACTOR PER JON BORDOVSKY, GBI PARTNERS, LP, 281.499.4539, COMPLETE IN PLACE	LS	1	\$6,998.00	\$6,998.00	\$6,998.00	\$6,998.00	\$6,998.00	\$6,998.00	\$6,998.00	\$6,998.00
2.	AS BUILT CONSTRUCTION STAKING BY THE CONTRACTOR PER JON BORDOVSKY, GBI PARTNERS, LP, 281.499.4539, COMPLETE IN PLACE	LS	1	\$2,500.00	\$2,500.00	\$2,500.00	\$2,500.00	\$2,500.00	\$2,500.00	\$2,500.00	\$2,500.00
3.	6" REINFORCED CONCRETE PAVEMENT, COMPLETE IN PLACE	SY	6607	\$47.00	\$310,529.00	\$51.70	\$341,581.90	\$55.27	\$365,168.89	\$53.60	\$354,135.20
4.	4" X 12" REINFORCED CONCRETE CURB, COMPLETE IN PLACE	LF	2140	\$4.00	\$8,560.00	\$4.65	\$9,951.00	\$4.00	\$8,560.00	\$3.50	\$7,490.00
5.	6" REINFORCED CONCRETE CURB, COMPLETE IN PLACE	LF	1528	\$4.00	\$6,112.00	\$4.65	\$7,105.20	\$4.00	\$6,112.00	\$3.50	\$5,348.00
6.	8" LIME STABILIZED SUBGRADE, (MISSOURI CITY SPECIFICATIONS), COMPLETE IN PLACE	SY	7847	\$4.00	\$31,388.00	\$3.75	\$29,426.25	\$5.00	\$39,235.00	\$10.00	\$78,470.00
7.	LIME FOR 8" STABILIZED SUBGRADE PREPARATION, 8% BY DRY WEIGHT (44 LBS/SY), AS REQUIRED BY SOIL CONDITIONS AND APPROVED BY GEOTECHNICAL ENGINEER, COMPLETE IN PLACE	TON	173	\$350.00	\$60,550.00	\$387.50	\$67,037.50	\$375.00	\$64,875.00	\$1.00	\$173.00
8.	ROADWAY EXCAVATION TO BE USED FOR FILL TO FINAL GRADE WITHIN THE PROJECT LIMITS, INCLUDES STRIPPING, STOCKPILING STRIPPINGS, EXCAVATION, PLACEMENT AND COMPACTION TO 95% STANDARD PROCTOR DENSITY, WITH MAXIMUM 8" LIFTS, AND RE-APPLICATION OF STRIPPINGS, COMPLETE IN PLACE	CY	14530	\$3.40	\$49,402.00	\$3.75	\$54,487.50	\$5.00	\$72,650.00	\$5.00	\$72,650.00
9.	EXCAVATION, HAULING, PLACEMENT AND COMPACTION OF EXCAVATION SPOILS TO BE HAULED USING ON-ROAD TRUCKS TO BE HAULED TO FILL SITE "A", WITHIN 4 MILES OF THE PROJECT, PLACED AND COMPACTED TO 95% STANDARD PROCTOR DENSITY WITH MAXIMUM 8" LIFTS, AS PER GEOTECHNICAL ENGINEER'S RECOMMENDATION, COMPLETE IN PLACE	CY	10084	\$16.25	\$163,865.00	\$14.60	\$147,226.40	\$10.00	\$100,840.00	\$21.00	\$211,764.00
10.	PERMANENT TRAFFIC CONTROL DEVICES, INCLUDES ALL TRAFFIC BUTTONS, PAVEMENT STRIPING, MARKERS, REFLECTIVE PAINT ON MEDIAN NOSES, STREET SIGNS, TRAFFIC SIGNS, ETC., COMPLETE IN PLACE	LS	1	\$5,800.00	\$5,800.00	\$4,669.00	\$4,669.00	\$5,000.00	\$5,000.00	\$3,075.00	\$3,075.00
11.	4" SQUARE DOUBLE REFLECTORIZED BLUE TRAFFIC BUTTON FOR FIRE HYDRANT LOCATION, COMPLETE IN PLACE	EA	7	\$16.00	\$112.00	\$9.40	\$65.80	\$25.00	\$175.00	\$10.00	\$70.00
12.	HAULING AND PLACING OF ONSITE STRIPPING ON LOTS AND RESERVES, COMPLETE IN PLACE	LS	1	\$4,100.00	\$4,100.00	\$5,262.00	\$5,262.00	\$1,000.00	\$1,000.00	\$500.00	\$500.00
13.	INSTALL, MAINTAIN, AND REMOVE STABILIZED CONSTRUCTION EXIT, AND REGRADE AREA TO MATCH FINISHED GRADE, COMPLETE IN PLACE	EA	1	\$1,500.00	\$1,500.00	\$1,500.00	\$1,500.00	\$3,000.00	\$3,000.00	\$1,500.00	\$1,500.00
14.	CITY OF MISSOURI CITY CONSTRUCTION PERMIT, COMPLETE IN PLACE	LS	1	\$11,000.00	\$11,000.00	\$3,304.00	\$3,304.00	\$18,000.00	\$18,000.00	\$500.00	\$500.00
15.	PROVIDE SUBDIVISION BOND IN THE AMOUNT OF \$126,711.90, COMPLETE IN PLACE	LS	1	\$2,050.00	\$2,050.00	\$4,600.00	\$4,600.00	\$20,000.00	\$20,000.00	\$1,000.00	\$1,000.00

BID TABULATION FOR:

PAVING AND APPURTENANCES TO SERVE SIENNA SECTION 70

BID OPENING DATE:
BID OPENING LOCATION:
TABULATION BY:
TABULATION DATE:
LIA JOB NO.

SIENNA MUNICIPAL UTILITY DISTRICT NO. 6
CITY OF MISSOURI CITY, FORT BEND COUNTY, TEXAS
MARCH 12, 2026
LJA ENGINEERING, INC.
E. PENA
MARCH 12, 2026
1416-1570P (9.2)

NO.	ITEM DESCRIPTION	UNIT	QTY	5) R CONSTRUCTION CIVIL, LLC		6) GMR TOTAL SERVICES, LLC		7) DECROSTA CONSTRUCTION		8) PRINCIPAL PAVING CONTRACTORS, LTD	
				UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
16.	FINAL LOT GRADING OF 92 LOTS AND ADJACENT RESERVES, COMPLETE IN PLACE	LS	1	\$19,000.00	\$19,000.00	\$14,100.00	\$14,100.00	\$20,000.00	\$20,000.00	\$25,460.00	\$25,460.00
17.	6" PVC IRRIGATION SLEEVE, SCHEDULE 40, INCLUDES RISERS, PVC END CAPS, CEMENT STABILIZED SAND BACKFILL AND MARKERS, COMPLETE IN PLACE	LF	300	\$25.00	\$7,500.00	\$32.70	\$9,810.00	\$40.00	\$12,000.00	\$20.00	\$6,000.00
18.	CONNECT PROPOSED 6" PAVEMENT TO EXISTING 6" PAVEMENT AND DOWEL INTO EXISTING CONCRETE PAVEMENT AND UNDERCUT, AND ANY OTHER APPURTENANCES, COMPLETE IN PLACE	LF	84	\$45.00	\$3,780.00	\$20.80	\$1,747.20	\$15.00	\$1,260.00	\$10.00	\$840.00
19.	ADA RAMPS, INCLUDES TRUNCATED DOME PAVERS WITH CONTRASTING COLOR PER DETAIL, COMPLETE IN PLACE	EA	6	\$1,750.00	\$10,500.00	\$1,465.00	\$8,790.00	\$1,800.00	\$10,800.00	\$1,424.00	\$8,544.00
20.	REMOVE AND OFFSITE DISPOSAL OF EXISTING TYPE III BARRICADE, COMPLETE IN PLACE	EA	3	\$1.00	\$3.00	\$185.50	\$556.50	\$100.00	\$300.00	\$50.00	\$150.00
21.	FORT BEND COUNTY RIGHT OF WAY PERMIT FOR TIE INTO EXISTING RIGHT OF WAY, COMPLETE IN PLACE	LS	1	\$500.00	\$500.00	\$500.00	\$500.00	\$1,500.00	\$1,500.00	\$500.00	\$500.00
22.	FORT BEND COUNTY DEVELOPMENT PERMIT FOR PLACING AND COMPACTING SPOILS, COMPLETE IN PLACE	LS	1	\$500.00	\$500.00	\$500.00	\$500.00	\$1,500.00	\$1,500.00	\$500.00	\$500.00
23.	FORT BEND COUNTY DRIVEWAY PERMIT FOR HAULING SPOILS ON SIENNA PARKWAY, COMPLETE IN PLACE	LS	1	\$500.00	\$500.00	\$500.00	\$500.00	\$1,500.00	\$1,500.00	\$500.00	\$500.00
24.	ADJUSTMENT TO CENTERPOINT UTILITIES, COMPLETE IN PLACE	LS	1	\$35,450.00	\$35,450.00	\$35,450.00	\$35,450.00	\$35,450.00	\$35,450.00	\$35,450.00	\$35,450.00
SUBTOTAL BASE BID PAVING IMPROVEMENT ITEMS (INTERNAL) - (SIENNA MUD NO. 6)					\$742,199.00		\$757,668.25		\$798,423.89		\$824,117.20
BASE BID MISCELLANEOUS ITEMS											
1.	STANDARD DEDUCT FOR VARIANCE REQUESTS SUBMITTED BY THE ENGINEER ON BEHALF OF THE CONTRACTOR, (AS DIRECTED BY ENGINEER), COMPLETE IN PLACE	EA	0	-\$1,000.00	\$0.00	-\$1,000.00	\$0.00	-\$1,000.00	\$0.00	-\$1,000.00	\$0.00
2.	STANDARD DEDUCT FOR STREET CLEANING (AS DIRECTED BY ENGINEER), COMPLETE IN PLACE	HR	0	-\$125.00	\$0.00	-\$125.00	\$0.00	-\$125.00	\$0.00	-\$125.00	\$0.00
3.	WETLANDS CROSSING FOR TEMPORARY ACCESS ROAD, INCLUDES MATTING, COMPLETE IN PLACE	EA	0	-\$10.00	\$0.00	-\$10.00	\$0.00	-\$10.00	\$0.00	-\$10.00	\$0.00
4.	STANDARD DEDUCT FOR DAMAGE TO A TREE MARKED FOR PRESERVATION, COMPLETE IN PLACE	EA	0	-\$1,000.00	\$0.00	-\$1,000.00	\$0.00	-\$1,000.00	\$0.00	-\$1,000.00	\$0.00
5.	FORT BEND COUNTY CONSTRUCTION COMPLETION AND FINAL ACCEPTANCE INSPECTION FEES, COMPLETE IN PLACE	EA	0	-\$500.00	\$0.00	-\$500.00	\$0.00	-\$500.00	\$0.00	-\$500.00	\$0.00
SUBTOTAL BASE BID MISCELLANEOUS ITEMS					\$0.00		\$0.00		\$0.00		\$0.00
ALTERNATE BID NO. 1 FIELD CONDITIONS ITEMS											
1.	ADDITIONAL 8" LIME STABILIZED SUBGRADE (MISSOURI CITY SPECIFICATIONS) TO BE USED FOR UNSTABLE SOIL CONDITIONS AS DIRECTED BY THE ENGINEER, COMPLETE IN PLACE	SY	7847	\$2.00	\$15,694.00	\$2.00	\$15,694.00	\$4.00	\$31,388.00	\$2.00	\$15,694.00

BID TABULATION FOR:

PAVING AND APPURTENANCES TO SERVE SIENNA SECTION 70

BID OPENING DATE:
BID OPENING LOCATION:
TABULATION BY:
TABULATION DATE:
LJA JOB NO.

SIENNA MUNICIPAL UTILITY DISTRICT NO. 6
CITY OF MISSOURI CITY, FORT BEND COUNTY, TEXAS
MARCH 12, 2026
LJA ENGINEERING, INC.
E. PENA
MARCH 12, 2026
1416-1570P (9.2)

NO.	ITEM DESCRIPTION	UNIT	QTY	5) R CONSTRUCTION CIVIL, LLC		6) GMR TOTAL SERVICES, LLC		7) DECROSTA CONSTRUCTION		8) PRINCIPAL PAVING CONTRACTORS, LTD	
				UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
2.	LIME FOR 8" STABILIZED SUBGRADE PREPARATION, 8% BY DRY WEIGHT (44 LBS/SY), AS REQUIRED BY SOIL CONDITIONS AND APPROVED BY GEOTECHNICAL ENGINEER, COMPLETE IN PLACE	TON	173	\$180.00	\$31,140.00	\$180.00	\$31,140.00	\$375.00	\$64,875.00	\$180.00	\$31,140.00
SUBTOTAL ALTERNATE BID NO. 1 FIELD CONDITIONS ITEMS					\$46,834.00		\$46,834.00		\$96,263.00		\$46,834.00
BID SUMMARY											
BASE BID PAVING IMPROVEMENT ITEMS (INTERNAL) - (SIENNA MUD NO. 6)					\$742,199.00		\$757,668.25		\$798,423.89		\$824,117.20
BASE BID MISCELLANEOUS ITEMS					\$0.00		\$0.00		\$0.00		\$0.00
TOTAL AMOUNT BASE BID					\$742,199.00		\$757,668.25		\$798,423.89		\$824,117.20
ALTERNATE BID NO. 1											
TOTAL AMOUNT BASE BID					\$742,199.00		\$757,668.25		\$798,423.89		\$824,117.20
FIELD CONDITIONS ITEMS					\$46,834.00		\$46,834.00		\$96,263.00		\$46,834.00
TOTAL ALTERNATE BID NO. 1 PLUS BASE BID					\$789,033.00		\$804,502.25		\$894,686.89		\$870,951.20

