

**BID TABULATION FOR:**

**BID OPENING DATE:**  
**BID OPENING LOCATION:**  
**TABULATION BY:**  
**TABULATION DATE:**  
**LJA JOB NO.**


CONSTRUCTION OF THE WATER, SANITARY SEWER AND DRAINAGE FACILITIES  
TO SERVE TAMARRON SECTION 13  
FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 182  
CITY OF FULSHEAR, FORT BEND COUNTY, TEXAS  
JANUARY 17, 2019  
LJA ENGINEERING, INC.  
C. DURHAM  
JANUARY 17, 2019  
1931-6051A (9.2)

BIDDER'S NAME	TOTAL BID AMOUNT
1) DIMAS BROS. CONSTRUCTION	\$1,522,000.00
2) TEXASITE, LLC	\$1,561,091.21
3) BLAZEY CONSTRUCTION SERVICES, LLC	\$1,618,122.70
4) R CONSTRUCTION CIVIL, LLC	\$1,728,513.45

CALENDAR DAYS - 100/110

*Melony Gay*

I, Melony Gay, P.E., hereby certify these bid tabulations to be true and correct.

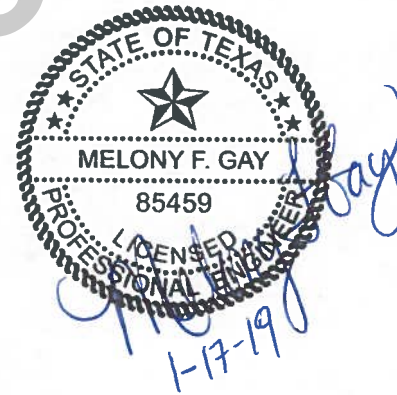

**BID TABULATION FOR:**

**BID OPENING DATE:**  
**BID OPENING LOCATION:**  
**TABULATION BY:**  
**TABULATION DATE:**  
**LJA JOB NO.**

CONSTRUCTION OF THE WATER, SANITARY SEWER AND DRAINAGE FACILITIES  
 TO SERVE TAMARRON SECTION 13  
 FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 182  
 CITY OF FULSHEAR, FORT BEND COUNTY, TEXAS  
 JANUARY 17, 2019  
 LJA ENGINEERING, INC.  
 C. DURHAM  
 JANUARY 17, 2019  
 1931-6051A (9.2)

ITEM DESCRIPTION	UNIT	QTY	1) DIMAS BROS. CONSTRUCTION		2) TEXASITE, LLC		3) BLAZEY CONSTRUCTION SERVICES, LLC		
			UNIT COST	TOTAL COST	UNIT COST	TOTAL COST	UNIT COST	TOTAL COST	
<b>WATER SYSTEM ITEMS</b>									
1. 6" P.V.C. WATER PIPE, AWWA C-900, DR 18, CLASS 235, ALL DEPTHS, INCLUDES BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	728	\$15.85	\$11,538.80	\$14.00	\$10,192.00	\$16.00	\$11,648.00	
2. 8" P.V.C. WATER PIPE, AWWA C-900, DR 18, CLASS 235, ALL DEPTHS, INCLUDES BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	4,572	\$20.35	\$93,040.20	\$19.00	\$86,868.00	\$19.50	\$89,154.00	
3. FIRE HYDRANT UNIT (MUELLER), ALL DEPTHS, INCLUDES APPROPRIATE TEE, 6" GATE VALVE & BOX, 6" LEAD AND FIRE HYDRANT, AND TRENCH SAFETY, COMPLETE IN PLACE	EA	9	\$3,595.00	\$32,355.00	\$3,800.00	\$34,200.00	\$3,700.00	\$33,300.00	
4. 6" AWWA GATE VALVE (MUELLER) & BOX, COMPLETE IN PLACE	EA	4	\$565.00	\$2,260.00	\$750.00	\$3,000.00	\$720.00	\$2,880.00	
5. 8" AWWA GATE VALVE (MUELLER) & BOX, COMPLETE IN PLACE	EA	8	\$865.00	\$6,920.00	\$1,200.00	\$9,600.00	\$1,050.00	\$8,400.00	
6. CAST IRON WATERLINE FITTINGS, COMPLETE IN PLACE	TON	1.91	\$1.00	\$1.91	\$2,400.00	\$4,584.00	\$2,530.00	\$4,832.30	
7. TRENCH SAFETY SYSTEM, ALL DEPTHS, COMPLETE IN PLACE	LF	5,300	\$1.00	\$5,300.00	\$1.00	\$5,300.00	\$1.00	\$5,300.00	
8. REMOVE AND DISPOSE EXISTING PLUG & CLAMP AND BLOW-OFF VALVE AND CONNECT PROPOSED WATER LINE, INCLUDES ALL NECESSARY ADAPTERS AND CONNECTORS, AND DISINFECTION OF EXISTING WATERLINE AS NEEDED, COMPLETE IN PLACE (ALL SIZES)	EA	2	\$300.00	\$600.00	\$400.00	\$800.00	\$760.00	\$1,520.00	
9. INSTALL, MAINTAIN, AND REMOVE STABILIZED CONSTRUCTION EXIT, SWMHCA SPECIFICATION NO. 4711 (TO BE USED ONLY AS DIRECTED BY THE ENGINEER), COMPLETE IN PLACE	EA	1	\$1,000.00	\$1,000.00	\$1,000.00	\$1,000.00	\$1,000.00	\$1,000.00	
10. METHOD "A" CONSTRUCTION STAKING BY THE CONTRACTOR PER GBI PARTNERS, LP, 281.499.4539, FOR WATER, SANITARY SEWER, AND DRAINAGE, COMPLETE IN PLACE	LS	1	\$19,000.00	\$19,000.00	\$19,000.00	\$19,000.00	\$19,000.00	\$19,000.00	
11. CITY OF FULSHEAR INSPECTION FEE (0.75% OF TOTAL CONSTRUCTION COST), COMPLETE IN PLACE	LS	1	\$11,050.00	\$11,050.00	\$5,800.00	\$5,800.00	\$12,150.00	\$12,150.00	
12. CLEARING & GRUBBING OF PUBLIC UTILITY EASEMENTS & RESERVES, TO BE USED ONLY AS DIRECTED BY THE ENGINEER, COMPLETE IN PLACE	AC	3.41	\$1,000.00	\$3,410.00	\$1.00	\$3.41	\$3,300.00	\$11,253.00	
13. CLEARING & GRUBBING OF R.O.W. FOR UTILITY INSTALLATION, AS NEEDED, AS DIRECTED BY THE ENGINEER, COMPLETE IN PLACE	AC	2.5	\$1,000.00	\$2,500.00	\$1.00	\$2.50	\$3,300.00	\$8,250.00	
<b>SUBTOTAL WATER SYSTEM ITEMS</b>				<b>\$188,975.91</b>		<b>\$180,349.91</b>		<b>\$208,687.30</b>	
<b>SANITARY SEWER FACILITIES</b>									
1. 8" P.V.C. SEWER PIPE, ASTM D-2241, SDR 26, CLASS 160, 0-12' DEPTH, INCLUDE BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	1,827	\$31.00	\$56,637.00	\$32.00	\$58,464.00	\$28.00	\$51,156.00	
2. 8" P.V.C. SEWER PIPE, AWWA C-900, DR 18, CLASS 235, 12'-16' DEPTH, INCLUDE BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	50	\$36.40	\$1,820.00	\$40.00	\$2,000.00	\$37.00	\$1,850.00	
3. 10" P.V.C. SEWER PIPE, AWWA C-900, DR 18, CLASS 235, 12'-16' DEPTH, INCLUDE BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	247	\$37.85	\$9,348.95	\$41.00	\$10,127.00	\$42.00	\$10,374.00	
4. 12" P.V.C. SEWER PIPE, ASTM D-2241, SDR 26, CLASS 160, 0-12' DEPTH, INCLUDE BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	306	\$36.80	\$11,260.80	\$37.00	\$11,322.00	\$36.00	\$11,016.00	
5. 12" P.V.C. SEWER PIPE, AWWA C-900, DR 18, CLASS 235, 12'-16' DEPTH, INCLUDE BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	1,552	\$43.80	\$67,977.60	\$49.00	\$76,048.00	\$48.00	\$74,496.00	

**BID TABULATION FOR:**

CONSTRUCTION OF THE WATER, SANITARY SEWER AND DRAINAGE FACILITIES  
 TO SERVE TAMARRON SECTION 13  
 FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 182  
 CITY OF FULSHEAR, FORT BEND COUNTY, TEXAS  
 JANUARY 17, 2019  
 LJA ENGINEERING, INC.  
 C. DURHAM  
 JANUARY 17, 2019  
 1931-6051A (9.2)

**BID OPENING DATE:**  
**BID OPENING LOCATION:**  
**TABULATION BY:**  
**TABULATION DATE:**  
**LJA JOB NO.**

ITEM	DESCRIPTION	UNIT	QTY	1) DIMAS BROS. CONSTRUCTION		2) TEXASITE, LLC		3) BLAZEY CONSTRUCTION SERVICES, LLC	
				UNIT COST	TOTAL COST	UNIT COST	TOTAL COST	UNIT COST	TOTAL COST
6.	STANDARD SANITARY SEWER MANHOLE FOR 6" - 24" SANITARY SEWER PIPES, (0' - 8' DEPTH), INCLUDING INFLOW PROTECTOR AND RAMNEK AT ALL JOINTS, COMPLETE IN PLACE	EA	25	\$2,900.00	\$72,500.00	\$2,850.00	\$71,250.00	\$2,070.00	\$51,750.00
7.	EXTRA DEPTH OF SANITARY SEWER MANHOLES, (OVER 8' DEPTH), COMPLETE IN PLACE	VF	66.68	\$95.00	\$6,334.60	\$145.00	\$9,668.60	\$130.00	\$8,668.40
8.	FINAL ADJUSTMENTS TO SANITARY MANHOLES, INCLUDING EXISTING MANHOLES, COMPLETE IN PLACE	EA	25	\$100.00	\$2,500.00	\$1.00	\$25.00	\$5.50	\$137.50
9.	SHORT SIDE DOUBLE OR SINGLE 6" PVC PIPE SERVICE LEADS, ASTM D-2441, SDR 26, CLASS 160, ALL DEPTHS, INCLUDING CEMENT STABILIZED SAND BACKFILL, RISER, WYE, PLUG, DROP, MARKER, TRENCH SAFETY, AND ANY NECESSARY FITTINGS, ETC., COMPLETE IN PLACE	EA	21	\$668.00	\$14,028.00	\$1,250.00	\$26,250.00	\$765.00	\$16,065.00
10.	LONG SIDE DOUBLE OR SINGLE 6" PVC PIPE SERVICE LEADS, ASTM D-2241, SDR 26, CLASS 160, ALL DEPTHS, INCLUDING CEMENT STABILIZED SAND BACKFILL, RISER WYE, PLUG, DROP, MARKER, TRENCH SAFETY, AND ANY NECESSARY FITTINGS, ETC., COMPLETE IN PLACE	LF	3,223	\$37.25	\$120,056.75	\$32.00	\$103,136.00	\$57.00	\$183,711.00
11.	STANDARD SANITARY SEWER DROP STRUCTURE ON MANHOLE, (0' - 2.5' DEPTH), COMPLETE IN PLACE	EA	3	\$475.00	\$1,425.00	\$550.00	\$1,650.00	\$635.00	\$1,905.00
12.	EXTRA DEPTH OF SANITARY SEWER DROP STRUCTURE ON MANHOLE, (OVER 2.5' OF DEPTHS), COMPLETE IN PLACE	VF	2.45	\$1.00	\$2.45	\$30.00	\$73.50	\$20.00	\$49.00
13.	DEWATERING PER LF OF PIPE (NO SEPARATE PAY FOR DOUBLE ROW IF NEEDED), (ALL DEPTHS, THIS IS AN ESTIMATED QUANTITY TO BE USED ONLY AT THE DIRECTION OF THE ENGINEER), COMPLETE IN PLACE	LF	3,982	\$20.00	\$79,640.00	\$20.00	\$79,640.00	\$20.00	\$79,640.00
14.	T.V. INSPECTION OF SANITARY SEWER LINES, (TO BE USED ONLY AT THE DIRECTION OF THE ENGINEER), COMPLETE IN PLACE	LF	3,982	\$3.00	\$11,946.00	\$3.00	\$11,946.00	\$3.00	\$11,946.00
15.	TRENCH SAFETY SYSTEM, ALL DEPTHS, COMPLETE IN PLACE	LF	3,982	\$1.00	\$3,982.00	\$1.00	\$3,982.00	\$1.00	\$3,982.00
16.	REMOVE AND DISPOSE SANITARY PLUG AND CONNECT TO EXISTING SANITARY SEWER LINE, COMPLETE IN PLACE	EA	2	\$100.00	\$200.00	\$400.00	\$800.00	\$1,180.00	\$2,360.00
<b>SUBTOTAL SANITARY SEWER FACILITIES</b>					<b>\$459,659.15</b>		<b>\$466,382.10</b>		<b>\$509,105.90</b>
<b>DRAINAGE FACILITIES ITEMS</b>									
1.	24" R.C.P. STORM SEWER, ASTM C-76, CLASS III, ALL DEPTHS, INCLUDES BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	3,002	\$60.75	\$182,371.50	\$59.00	\$177,118.00	\$53.00	\$159,106.00
2.	30" R.C.P. STORM SEWER, ASTM C-76, CLASS III, ALL DEPTHS, INCLUDES BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	794	\$77.35	\$61,415.90	\$74.00	\$58,756.00	\$68.00	\$53,992.00
3.	36" R.C.P. STORM SEWER, ASTM C-76, CLASS III, ALL DEPTHS, INCLUDES BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	468	\$97.00	\$45,396.00	\$98.00	\$45,864.00	\$91.00	\$42,588.00
4.	42" R.C.P. STORM SEWER, ASTM C-76, CLASS III, ALL DEPTHS, INCLUDES BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	199	\$130.00	\$25,870.00	\$130.00	\$25,870.00	\$124.00	\$24,676.00
5.	48" R.C.P. STORM SEWER, ASTM C-76, CLASS III, ALL DEPTHS, INCLUDES BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	378	\$153.00	\$57,834.00	\$151.00	\$57,078.00	\$146.00	\$55,188.00
6.	60" R.C.P. STORM SEWER, ASTM C-76, CLASS III, ALL DEPTHS, INCLUDES BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	486	\$228.00	\$110,808.00	\$239.00	\$116,154.00	\$247.00	\$120,042.00
7.	STAGE I - STANDARD 5' PRECAST INLET ("H-2") ALL DEPTHS, (INCLUDES INLET PROTECTION BARRIER FOR STAGE I INLETS), COMPLETE IN PLACE	EA	29	\$840.00	\$24,360.00	\$1,200.00	\$34,800.00	\$1,441.00	\$41,789.00

**BID TABULATION FOR:**

**BID OPENING DATE:**  
**BID OPENING LOCATION:**  
**TABULATION BY:**  
**TABULATION DATE:**  
**LJA JOB NO.**

CONSTRUCTION OF THE WATER, SANITARY SEWER AND DRAINAGE FACILITIES  
 TO SERVE TAMARRON SECTION 13  
 FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 182  
 CITY OF FULSHEAR, FORT BEND COUNTY, TEXAS  
 JANUARY 17, 2019  
 LJA ENGINEERING, INC.  
 C. DURHAM  
 JANUARY 17, 2019  
 1931-6051A (9.2)

ITEM	DESCRIPTION	UNIT	QTY	1) DIMAS BROS. CONSTRUCTION		2) TEXASITE, LLC		3) BLAZEY CONSTRUCTION SERVICES, LLC	
				UNIT COST	TOTAL COST	UNIT COST	TOTAL COST	UNIT COST	TOTAL COST
8.	STAGE II - STANDARD 5' PRECAST INLET ("H-2"), (INCLUDES TEMPORARY SAND - FILLED BURLAP BAGS FOR EROSION AND SEDIMENT CONTROL), COMPLETE IN PLACE	EA	29	\$1,210.00	\$35,090.00	\$1,200.00	\$34,800.00	\$1,320.00	\$38,280.00
9.	STAGE I - STANDARD PRECAST INLET TYPE "C-1", ALL DEPTHS, (INCLUDES INLET PROTECTION BARRIER FOR STAGE I INLETS), COMPLETE IN PLACE	EA	11	\$1,204.00	\$13,244.00	\$1,400.00	\$15,400.00	\$1,452.00	\$15,972.00
10.	STAGE II - STANDARD PRECAST INLET TYPE "C-1", (INCLUDES TEMPORARY SAND - FILLED BURLAP BAGS FOR EROSION AND SEDIMENT CONTROL), COMPLETE IN PLACE	EA	11	\$1,650.00	\$18,150.00	\$1,800.00	\$19,800.00	\$2,420.00	\$26,620.00
11.	TYPE "C" MANHOLE FOR 42" STORM SEWERS AND SMALLER, ALL DEPTHS, COMPLETE IN PLACE	EA	24	\$2,260.00	\$54,240.00	\$2,600.00	\$62,400.00	\$2,145.00	\$51,480.00
12.	TYPE "C" MANHOLE FOR 48" STORM SEWERS AND LARGER, ALL DEPTHS, COMPLETE IN PLACE	EA	7	\$3,464.00	\$24,248.00	\$4,000.00	\$28,000.00	\$3,020.00	\$21,140.00
13.	TYPE "C" MANHOLE FOR 48" STORM SEWERS AND LARGER, ALL DEPTHS, WITH TYPE "A" INLET TOP, ALL DEPTHS, INCLUDES SILT BARRIER FENCE, COMPLETE IN PLACE	EA	1	\$3,500.00	\$3,500.00	\$4,000.00	\$4,000.00	\$3,834.00	\$3,834.00
14.	JUNCTION BOX WITH TYPE "C" MANHOLE TOP, ALL DEPTHS, COMPLETE IN PLACE	EA	3	\$6,800.00	\$20,400.00	\$8,000.00	\$24,000.00	\$5,390.00	\$16,170.00
15.	FINAL ADJUSTMENT OF MANHOLE AND JUNCTION BOX RIM AND INLET THROAT AND OPENING ELEVATIONS, COMPLETE IN PLACE	EA	39	\$85.00	\$3,315.00	\$1.00	\$39.00	\$5.50	\$214.50
16.	TYPE "A" INLET, ALL DEPTHS, INCLUDES SILT BARRIER FENCE, COMPLETE IN PLACE	EA	4	\$1,500.00	\$6,000.00	\$2,800.00	\$11,200.00	\$1,380.00	\$5,520.00
17.	TRENCH SAFETY SYSTEM, ALL DEPTHS, COMPLETE IN PLACE	LF	5,327	\$1.00	\$5,327.00	\$1.00	\$5,327.00	\$1.00	\$5,327.00
18.	4" CONCRETE SLOPE PAVING WITH 2' MINIMUM TOE WALLS ALL AROUND, 2' CLAY LINER BELOW ALL SLOPE PAVING, AND EXPANSION JOINTS, PER DETAIL, COMPLETE IN PLACE	SY	152	\$84.00	\$12,768.00	\$82.00	\$12,464.00	\$72.00	\$10,944.00
19.	RIP RAP, COMPLETE IN PLACE	SY	89	\$68.00	\$6,052.00	\$70.00	\$6,230.00	\$88.00	\$7,832.00
20.	REMOVE EXISTING 8" BRICK PLUG FOR STORM SEWER AND CONNECT PROPOSED 24" STORM SEWER, ALL SIZES, ALL DEPTHS, COMPLETE IN PLACE	EA	1	\$1,100.00	\$1,100.00	\$450.00	\$450.00	\$1,182.00	\$1,182.00
21.	BACKSLOPE DRAIN INTERCEPTOR STRUCTURES, INCLUDING ALL PIPES, SLOPE PAVING WITH REINFORCING STEEL AT INFLOW AND OUTFLOW, RIP RAP, NECESSARY ADAPTORS, JOINTS AND FITTINGS, ETC., SPOILS TO BE HAULED, PLACED, AND COMPACTED TO 95% STANDARD PROCTOR DENSITY WITH MAXIMUM 8" LIFTS IN FILL AREAS, TO BE APPROVED BY ENGINEER, COMPLETE IN PLACE	EA	3	\$11,800.00	\$35,400.00	\$10,500.00	\$31,500.00	\$7,591.00	\$22,773.00
22.	DRAINAGE SWALES IN HIGH BANK OF LAKE, INCLUDING HYDROMULCH, AS SHOWN ON GRADING PLAN, COMPLETE IN PLACE	LF	2,560	\$2.00	\$5,120.00	\$2.00	\$5,120.00	\$2.00	\$5,120.00
23.	MISCELLANEOUS DRAINAGE SWALES, V-BOTTOM, GRADED TO DRAIN, INCLUDING HYDROMULCH, AT THE DIRECTION OF THE ENGINEER, COMPLETE IN PLACE	LF	4,000	\$2.00	\$8,000.00	\$2.00	\$8,000.00	\$2.00	\$8,000.00
24.	SILT FENCE INLET PROTECTION BARRIERS, SWMHCA SPECIFICATION NO.4511, FOR EXISTING INLETS, (TO BE USED ONLY AS DIRECTED BY THE ENGINEER), COMPLETE IN PLACE	EA	4	\$10.00	\$40.00	\$50.00	\$200.00	\$88.00	\$352.00
25.	INSTALLATION, MAINTENANCE, AND REMOVAL OF REINFORCED FILTER FABRIC FENCE SWMHCA SPECIFICATIONS NO.4311, (TO BE USED ONLY AS DIRECTED BY THE ENGINEER), COMPLETE IN PLACE	LF	5,017	\$1.60	\$8,027.20	\$1.60	\$8,027.20	\$1.60	\$8,027.20

BID TABULATION FOR:

BID OPENING DATE:  
 BID OPENING LOCATION:  
 TABULATION BY:  
 TABULATION DATE:  
 LJA JOB NO.

CONSTRUCTION OF THE WATER, SANITARY SEWER AND DRAINAGE FACILITIES  
 TO SERVE TAMARRON SECTION 13  
 FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 182  
 CITY OF FULSHEAR, FORT BEND COUNTY, TEXAS  
 JANUARY 17, 2019  
 LJA ENGINEERING, INC.  
 C. DURHAM  
 JANUARY 17, 2019  
 1931-6051A (9.2)

ITEM	DESCRIPTION	UNIT	QTY	1) DIMAS BROS. CONSTRUCTION		2) TEXASITE, LLC		3) BLAZEY CONSTRUCTION SERVICES, LLC	
				UNIT COST	TOTAL COST	UNIT COST	TOTAL COST	UNIT COST	TOTAL COST
26.	EXISTING 24" C.G.M.P. TO BE REMOVED AND DISPOSED OF, INCLUDING EXISTING BACKSLOPE INTERCEPTOR AND ALL SLOPE PAVING AND RIP RAP, COMPLETE IN PLACE	LF	115	\$18.00	\$2,070.00	\$30.00	\$3,450.00	\$22.00	\$2,530.00
27.	COFFER DAM, INCLUDING INSTALLATION, MAINTENANCE, AND REMOVAL, COMPLETE IN PLACE	EA	6	\$1,800.00	\$10,800.00	\$3,200.00	\$19,200.00	\$7,151.00	\$42,906.00
28.	STORM WATER POLLUTION PREVENTION PLAN COMPLIANCE, INCLUDING CONTRACTOR BOOKLET, NOI AND NOT, COMPLETE IN PLACE	LS	1	\$1,071.44	\$1,071.44	\$1,200.00	\$1,200.00	\$908.00	\$908.00
29.	UTILITY SPOILS TO BE USED AS FILL WITHIN SECTION AND ADJACENT EXISTING SECTION, INCLUDES EXCAVATION, HAULING, PLACING, AND COMPACTION TO 95% STANDARD PROCTOR DENSITY WITH MAXIMUM 8" LOOSE LIFTS AS DIRECTED BY THE ENGINEER, COMPLETE IN PLACE	CY	10,206	\$1.00	\$10,206.00	\$1.00	\$10,206.00	\$1.80	\$18,370.80
30.	HAUL DIRT FROM STOCKPILE NO. 2, LESS THAN 1.25 MILES AWAY, AND COMPACTED TO 95% STANDARD PROCTOR DENSITY ON-SITE FOR FILL OF EXISTING SWALE AND PROPOSED BERM, AS DIRECTED BY ENGINEER, COMPLETE IN PLACE	CY	2,520	\$3.80	\$9,576.00	\$8.00	\$20,160.00	\$9.85	\$24,822.00
31.	24" R.C.P. STORM SEWER FOR SWALE DRAINAGE, ASTM C-76, CLASS III, ALL DEPTHS, INCLUDES BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	818	\$65.55	\$53,619.90	\$52.00	\$42,536.00	\$58.00	\$47,444.00
32.	TYPE "A" INLET FOR SWALE DRAINAGE, ALL DEPTHS, INCLUDES SILT BARRIER FENCE, COMPLETE IN PLACE	EA	2	\$1,500.00	\$3,000.00	\$2,500.00	\$5,000.00	\$1,380.00	\$2,760.00
33.	TYPE "C" MANHOLE FOR 42" STORM SEWERS AND SMALLER FOR SWALE DRAINAGE, ALL DEPTHS, COMPLETE IN PLACE	EA	1	\$2,260.00	\$2,260.00	\$2,700.00	\$2,700.00	\$2,360.00	\$2,360.00
34.	CORE INTO EXISTING STORM SEWER MANHOLE AND CONNECT PROPOSED STORM SEWER PIPE, INCLUDING ALL SEALS AND APPURTENANCES NECESSARY, COMPLETE IN PLACE	EA	1	\$1,100.00	\$1,100.00	\$400.00	\$400.00	\$2,500.00	\$2,500.00
35.	DEMUCK EXISTING DRAINAGE SWALES FOR FILL, AS DIRECTED BY ENGINEER, COMPLETE IN PLACE	LF	835	\$2.00	\$1,670.00	\$2.00	\$1,670.00	\$2.00	\$1,670.00
36.	REMOVE AND REPLACE EXISTING SIDEWALK AFTER STORM SEWER CONSTRUCTION, COMPLETE IN PLACE	LF	85	\$75.00	\$6,375.00	\$60.00	\$5,100.00	\$34.00	\$2,890.00
37.	TEMPORARY REMOVAL OF EXISTING TYPE III BARRICADE FOR MOBILIZATION, BARRICADE TO BE REINSTALLED ONCE ON-SITE, COMPLETE IN PLACE	EA	1	\$100.00	\$100.00	\$600.00	\$600.00	\$550.00	\$550.00
38.	TEMPORARY REMOVAL OF EXISTING TYPE III BARRICADE FOR DEMOBILIZATION, BARRICADE TO BE REINSTALLED ONCE OFF-SITE, COMPLETE IN PLACE	EA	1	\$100.00	\$100.00	\$600.00	\$600.00	\$550.00	\$550.00
39.	PROPOSED SWALE PER EXHIBIT, INCLUDING HYDROMULCH, COMPLETE IN PLACE	LF	1,120	\$2.00	\$2,240.00	\$7.00	\$7,840.00	\$2.50	\$2,800.00
40.	AS BUILT SURVEY OF STOCKPILE NO. 2, MUST BE DONE BY GBI PARTNERS, LP, 713.955.1306, AND MUST BE SUBMITTED TO ENGINEER FOR REVIEW AND APPROVAL, PRIOR TO PAYMENT, COMPLETE IN PLACE	LS	1	\$1,100.00	\$1,100.00	\$1,100.00	\$1,100.00	\$1,100.00	\$1,100.00
<b>SUBTOTAL DRAINAGE FACILITIES ITEMS</b>					<b>\$873,364.94</b>		<b>\$914,359.20</b>		<b>\$900,329.50</b>
<b>BID SUMMARY</b>									
SUBTOTAL WATER SYSTEM ITEMS					\$188,975.91		\$180,349.91		\$208,687.30
SUBTOTAL SANITARY SEWER FACILITIES					\$459,659.15		\$466,382.10		\$509,105.90
SUBTOTAL DRAINAGE FACILITIES ITEMS					\$873,364.94		\$914,359.20		\$900,329.50
<b>TOTAL AMOUNT BID</b>					<b>\$1,522,000.00</b>		<b>\$1,561,091.21</b>		<b>\$1,618,122.70</b>

**BID TABULATION FOR:**

CONSTRUCTION OF THE WATER, SANITARY SEWER AND DRAINAGE FACILITIES  
 TO SERVE TAMARRON SECTION 13  
 FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 182  
 CITY OF FULSHEAR, FORT BEND COUNTY, TEXAS  
 JANUARY 17, 2019  
 LJA ENGINEERING, INC.  
 C. DURHAM  
 JANUARY 17, 2019  
 1931-6051A (9.2)

**BID OPENING DATE:**  
**BID OPENING LOCATION:**  
**TABULATION BY:**  
**TABULATION DATE:**  
**LJA JOB NO.**

4) R CONSTRUCTION CIVIL, LLC  
 UNIT COST      TOTAL COST

ITEM DESCRIPTION	UNIT	QTY	UNIT COST	TOTAL COST
<b>WATER SYSTEM ITEMS</b>				
1. 6" P.V.C. WATER PIPE, AWWA C-900, DR 18, CLASS 235, ALL DEPTHS, INCLUDES BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	728	\$17.00	\$12,376.00
2. 8" P.V.C. WATER PIPE, AWWA C-900, DR 18, CLASS 235, ALL DEPTHS, INCLUDES BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	4,572	\$19.00	\$86,868.00
3. FIRE HYDRANT UNIT (MUELLER), ALL DEPTHS, INCLUDES APPROPRIATE TEE, 6" GATE VALVE & BOX, 6" LEAD AND FIRE HYDRANT, AND TRENCH SAFETY, COMPLETE IN PLACE	EA	9	\$4,300.00	\$38,700.00
4. 6" AWWA GATE VALVE (MUELLER) & BOX, COMPLETE IN PLACE	EA	4	\$800.00	\$3,200.00
5. 8" AWWA GATE VALVE (MUELLER) & BOX, COMPLETE IN PLACE	EA	8	\$1,200.00	\$9,600.00
6. CAST IRON WATERLINE FITTINGS, COMPLETE IN PLACE	TON	1.91	\$1,000.00	\$1,910.00
7. TRENCH SAFETY SYSTEM, ALL DEPTHS, COMPLETE IN PLACE	LF	5,300	\$1.00	\$5,300.00
8. REMOVE AND DISPOSE EXISTING PLUG & CLAMP AND BLOW-OFF VALVE AND CONNECT PROPOSED WATER LINE, INCLUDES ALL NECESSARY ADAPTERS AND CONNECTORS, AND DISINFECTION OF EXISTING WATERLINE AS NEEDED, COMPLETE IN PLACE (ALL SIZES)	EA	2	\$150.00	\$300.00
9. INSTALL, MAINTAIN, AND REMOVE STABILIZED CONSTRUCTION EXIT, SWMHCA SPECIFICATION NO. 4711 (TO BE USED ONLY AS DIRECTED BY THE ENGINEER), COMPLETE IN PLACE	EA	1	\$1,000.00	\$1,000.00
10. METHOD "A" CONSTRUCTION STAKING BY THE CONTRACTOR PER GBI PARTNERS, LP, 281.499.4539, FOR WATER, SANITARY SEWER, AND DRAINAGE, COMPLETE IN PLACE	LS	1	\$19,000.00	\$19,000.00
11. CITY OF FULSHEAR INSPECTION FEE (0.75% OF TOTAL CONSTRUCTION COST), COMPLETE IN PLACE	LS	1	\$12,860.00	\$12,860.00
12. CLEARING & GRUBBING OF PUBLIC UTILITY EASEMENTS & RESERVES, TO BE USED ONLY AS DIRECTED BY THE ENGINEER, COMPLETE IN PLACE	AC	3.41	\$6,500.00	\$22,165.00
13. CLEARING & GRUBBING OF R.O.W. FOR UTILITY INSTALLATION, AS NEEDED, AS DIRECTED BY THE ENGINEER, COMPLETE IN PLACE	AC	2.5	\$6,500.00	\$16,250.00
<b>SUBTOTAL WATER SYSTEM ITEMS</b>				<b>\$229,529.00</b>
<b>SANITARY SEWER FACILITIES</b>				
1. 8" P.V.C. SEWER PIPE, ASTM D-2241, SDR 26, CLASS 160, 0-12' DEPTH, INCLUDE BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	1,827	\$27.00	\$49,329.00
2. 8" P.V.C. SEWER PIPE, AWWA C-900, DR 18, CLASS 235, 12'-16' DEPTH, INCLUDE BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	50	\$35.00	\$1,750.00
3. 10" P.V.C. SEWER PIPE, AWWA C-900, DR 18, CLASS 235, 12'-16' DEPTH, INCLUDE BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	247	\$42.00	\$10,374.00
4. 12" P.V.C. SEWER PIPE, ASTM D-2241, SDR 26, CLASS 160, 0-12' DEPTH, INCLUDE BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	306	\$39.00	\$11,934.00
5. 12" P.V.C. SEWER PIPE, AWWA C-900, DR 18, CLASS 235, 12'-16' DEPTH, INCLUDE BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	1,552	\$49.00	\$76,048.00

**BID TABULATION FOR:**

**BID OPENING DATE:**  
**BID OPENING LOCATION:**  
**TABULATION BY:**  
**TABULATION DATE:**  
**LJA JOB NO.**

CONSTRUCTION OF THE WATER, SANITARY SEWER AND DRAINAGE FACILITIES  
 TO SERVE TAMARRON SECTION 13  
 FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 182  
 CITY OF FULSHEAR, FORT BEND COUNTY, TEXAS  
 JANUARY 17, 2019  
 LJA ENGINEERING, INC.  
 C. DURHAM  
 JANUARY 17, 2019  
 1931-6051A (9.2)

4) R CONSTRUCTION CIVIL, LLC

ITEM	DESCRIPTION	UNIT	QTY	UNIT COST	TOTAL COST
6.	STANDARD SANITARY SEWER MANHOLE FOR 6" - 24" SANITARY SEWER PIPES, (0' - 8' DEPTH), INCLUDING INFLOW PROTECTOR AND RAMNEK AT ALL JOINTS, COMPLETE IN PLACE	EA	25	\$2,500.00	\$62,500.00
7.	EXTRA DEPTH OF SANITARY SEWER MANHOLES, (OVER 8' DEPTH), COMPLETE IN PLACE	VF	66.68	\$135.00	\$9,001.80
8.	FINAL ADJUSTMENTS TO SANITARY MANHOLES, INCLUDING EXISTING MANHOLES, COMPLETE IN PLACE	EA	25	\$1.00	\$25.00
9.	SHORT SIDE DOUBLE OR SINGLE 6" PVC PIPE SERVICE LEADS, ASTM D-2441, SDR 26, CLASS 160, ALL DEPTHS, INCLUDING CEMENT STABILIZED SAND BACKFILL, RISER, WYE, PLUG, DROP, MARKER, TRENCH SAFETY, AND ANY NECESSARY FITTINGS, ETC., COMPLETE IN PLACE	EA	21	\$890.00	\$18,690.00
10.	LONG SIDE DOUBLE OR SINGLE 6" PVC PIPE SERVICE LEADS, ASTM D-2441, SDR 26, CLASS 160, ALL DEPTHS, INCLUDING CEMENT STABILIZED SAND BACKFILL, RISER WYE, PLUG, DROP, MARKER, TRENCH SAFETY, AND ANY NECESSARY FITTINGS, ETC., COMPLETE IN PLACE	LF	3,223	\$33.00	\$106,359.00
11.	STANDARD SANITARY SEWER DROP STRUCTURE ON MANHOLE, (0' - 2.5' DEPTH), COMPLETE IN PLACE	EA	3	\$600.00	\$1,800.00
12.	EXTRA DEPTH OF SANITARY SEWER DROP STRUCTURE ON MANHOLE, (OVER 2.5' OF DEPTHS), COMPLETE IN PLACE	VF	2.45	\$25.00	\$61.25
13.	DEWATERING PER LF OF PIPE (NO SEPARATE PAY FOR DOUBLE ROW IF NEEDED), (ALL DEPTHS, THIS IS AN ESTIMATED QUANTITY TO BE USED ONLY AT THE DIRECTION OF THE ENGINEER), COMPLETE IN PLACE	LF	3,982	\$20.00	\$79,640.00
14.	T.V. INSPECTION OF SANITARY SEWER LINES, (TO BE USED ONLY AT THE DIRECTION OF THE ENGINEER), COMPLETE IN PLACE	LF	3,982	\$3.00	\$11,946.00
15.	TRENCH SAFETY SYSTEM, ALL DEPTHS, COMPLETE IN PLACE	LF	3,982	\$1.00	\$3,982.00
16.	REMOVE AND DISPOSE SANITARY PLUG AND CONNECT TO EXISTING SANITARY SEWER LINE, COMPLETE IN PLACE	EA	2	\$150.00	\$300.00
<b>SUBTOTAL SANITARY SEWER FACILITIES</b>					<b>\$443,740.05</b>
<b>DRAINAGE FACILITIES ITEMS</b>					
1.	24" R.C.P. STORM SEWER, ASTM C-76, CLASS III, ALL DEPTHS, INCLUDES BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	3,002	\$62.00	\$186,124.00
2.	30" R.C.P. STORM SEWER, ASTM C-76, CLASS III, ALL DEPTHS, INCLUDES BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	794	\$80.00	\$63,520.00
3.	36" R.C.P. STORM SEWER, ASTM C-76, CLASS III, ALL DEPTHS, INCLUDES BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	468	\$106.00	\$49,608.00
4.	42" R.C.P. STORM SEWER, ASTM C-76, CLASS III, ALL DEPTHS, INCLUDES BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	199	\$136.00	\$27,064.00
5.	48" R.C.P. STORM SEWER, ASTM C-76, CLASS III, ALL DEPTHS, INCLUDES BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	378	\$164.00	\$61,992.00
6.	60" R.C.P. STORM SEWER, ASTM C-76, CLASS III, ALL DEPTHS, INCLUDES BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	486	\$354.00	\$172,044.00
7.	STAGE I - STANDARD 5' PRECAST INLET ("H-2") ALL DEPTHS, (INCLUDES INLET PROTECTION BARRIER FOR STAGE I INLETS), COMPLETE IN PLACE	EA	29	\$1,100.00	\$31,900.00

BID TABULATION FOR:

BID OPENING DATE:  
 BID OPENING LOCATION:  
 TABULATION BY:  
 TABULATION DATE:  
 LJA JOB NO.

CONSTRUCTION OF THE WATER, SANITARY SEWER AND DRAINAGE FACILITIES  
 TO SERVE TAMARRON SECTION 13  
 FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 182  
 CITY OF FULSHEAR, FORT BEND COUNTY, TEXAS  
 JANUARY 17, 2019  
 LJA ENGINEERING, INC.  
 C. DURHAM  
 JANUARY 17, 2019  
 1931-6051A (9.2)

4) R CONSTRUCTION CIVIL, LLC

ITEM	DESCRIPTION	UNIT	QTY	UNIT COST	TOTAL COST
8.	STAGE II - STANDARD 5' PRECAST INLET ("H-2"), (INCLUDES TEMPORARY SAND - FILLED BURLAP BAGS FOR EROSION AND SEDIMENT CONTROL), COMPLETE IN PLACE	EA	29	\$1,300.00	\$37,700.00
9.	STAGE I - STANDARD PRECAST INLET TYPE "C-1", ALL DEPTHS, (INCLUDES INLET PROTECTION BARRIER FOR STAGE I INLETS), COMPLETE IN PLACE	EA	11	\$1,400.00	\$15,400.00
10.	STAGE II - STANDARD PRECAST INLET TYPE "C-1", (INCLUDES TEMPORARY SAND - FILLED BURLAP BAGS FOR EROSION AND SEDIMENT CONTROL), COMPLETE IN PLACE	EA	11	\$1,600.00	\$17,600.00
11.	TYPE "C" MANHOLE FOR 42" STORM SEWERS AND SMALLER, ALL DEPTHS, COMPLETE IN PLACE	EA	24	\$2,000.00	\$48,000.00
12.	TYPE "C" MANHOLE FOR 48" STORM SEWERS AND LARGER, ALL DEPTHS, COMPLETE IN PLACE	EA	7	\$3,200.00	\$22,400.00
13.	TYPE "C" MANHOLE FOR 48" STORM SEWERS AND LARGER, ALL DEPTHS, WITH TYPE "A" INLET TOP, ALL DEPTHS, INCLUDES SILT BARRIER FENCE, COMPLETE IN PLACE	EA	1	\$6,200.00	\$6,200.00
14.	JUNCTION BOX WITH TYPE "C" MANHOLE TOP, ALL DEPTHS, COMPLETE IN PLACE	EA	3	\$9,000.00	\$27,000.00
15.	FINAL ADJUSTMENT OF MANHOLE AND JUNCTION BOX RIM AND INLET THROAT AND OPENING ELEVATIONS, COMPLETE IN PLACE	EA	39	\$1.00	\$39.00
16.	TYPE "A" INLET, ALL DEPTHS, INCLUDES SILT BARRIER FENCE, COMPLETE IN PLACE	EA	4	\$1,400.00	\$5,600.00
17.	TRENCH SAFETY SYSTEM, ALL DEPTHS, COMPLETE IN PLACE	LF	5,327	\$1.00	\$5,327.00
18.	4" CONCRETE SLOPE PAVING WITH 2" MINIMUM TOE WALLS ALL AROUND, 2" CLAY LINER BELOW ALL SLOPE PAVING, AND EXPANSION JOINTS, PER DETAIL, COMPLETE IN PLACE	SY	152	\$110.00	\$16,720.00
19.	RIP RAP, COMPLETE IN PLACE	SY	89	\$85.00	\$7,565.00
20.	REMOVE EXISTING 8" BRICK PLUG FOR STORM SEWER AND CONNECT PROPOSED 24" STORM SEWER, ALL SIZES, ALL DEPTHS, COMPLETE IN PLACE	EA	1	\$500.00	\$500.00
21.	BACKSLOPE DRAIN INTERCEPTOR STRUCTURES, INCLUDING ALL PIPES, SLOPE PAVING WITH REINFORCING STEEL AT INFLOW AND OUTFLOW, RIP RAP, NECESSARY ADAPTORS, JOINTS AND FITTINGS, ETC., SPOILS TO BE HAULED, PLACED, AND COMPACTED TO 95% STANDARD PROCTOR DENSITY WITH MAXIMUM 8" LIFTS IN FILL AREAS, TO BE APPROVED BY ENGINEER, COMPLETE IN PLACE	EA	3	\$5,800.00	\$17,400.00
22.	DRAINAGE SWALES IN HIGH BANK OF LAKE, INCLUDING HYDROMULCH, AS SHOWN ON GRADING PLAN, COMPLETE IN PLACE	LF	2,560	\$4.50	\$11,520.00
23.	MISCELLANEOUS DRAINAGE SWALES, V-BOTTOM, GRADED TO DRAIN, INCLUDING HYDROMULCH, AT THE DIRECTION OF THE ENGINEER, COMPLETE IN PLACE	LF	4,000	\$3.00	\$12,000.00
24.	SILT FENCE INLET PROTECTION BARRIERS, SWMHCA SPECIFICATION NO.4511, FOR EXISTING INLETS, (TO BE USED ONLY AS DIRECTED BY THE ENGINEER), COMPLETE IN PLACE	EA	4	\$100.00	\$400.00
25.	INSTALLATION, MAINTENANCE, AND REMOVAL OF REINFORCED FILTER FABRIC FENCE SWMHCA SPECIFICATIONS NO.4311, (TO BE USED ONLY AS DIRECTED BY THE ENGINEER), COMPLETE IN PLACE	LF	5,017	\$1.60	\$8,027.20



**BID TABULATION FOR:**

**BID OPENING DATE:**  
**BID OPENING LOCATION:**  
**TABULATION BY:**  
**TABULATION DATE:**  
**LJA JOB NO.**

CONSTRUCTION OF THE WATER, SANITARY SEWER AND DRAINAGE FACILITIES  
 TO SERVE TAMARRON SECTION 13  
 FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 182  
 CITY OF FULSHEAR, FORT BEND COUNTY, TEXAS  
 JANUARY 17, 2019  
 LJA ENGINEERING, INC.  
 C. DURHAM  
 JANUARY 17, 2019  
 1931-6051A (9.2)

4) R CONSTRUCTION CIVIL, LLC

ITEM	DESCRIPTION	UNIT	QTY	UNIT COST	TOTAL COST
26.	EXISTING 24" C.G.M.P. TO BE REMOVED AND DISPOSED OF, INCLUDING EXISTING BACKSLOPE INTERCEPTOR AND ALL SLOPE PAVING AND RIP RAP, COMPLETE IN PLACE	LF	115	\$46.00	\$5,290.00
27.	COFFER DAM, INCLUDING INSTALLATION, MAINTENANCE, AND REMOVAL, COMPLETE IN PLACE	EA	6	\$9,500.00	\$57,000.00
28.	STORM WATER POLLUTION PREVENTION PLAN COMPLIANCE, INCLUDING CONTRACTOR BOOKLET, NOI AND NOT, COMPLETE IN PLACE	LS	1	\$1,200.00	\$1,200.00
29.	UTILITY SPOILS TO BE USED AS FILL WITHIN SECTION AND ADJACENT EXISTING SECTION, INCLUDES EXCAVATION, HAULING, PLACING, AND COMPACTION TO 95% STANDARD PROCTOR DENSITY WITH MAXIMUM 8" LOOSE LIFTS AS DIRECTED BY THE ENGINEER, COMPLETE IN PLACE	CY	10,206	\$4.70	\$47,968.20
30.	HAUL DIRT FROM STOCKPILE NO. 2, LESS THAN 1.25 MILES AWAY, AND COMPACTION TO 95% STANDARD PROCTOR DENSITY ON-SITE FOR FILL OF EXISTING SWALE AND PROPOSED BERM, AS DIRECTED BY ENGINEER, COMPLETE IN PLACE	CY	2,520	\$6.00	\$15,120.00
31.	24" R.C.P. STORM SEWER FOR SWALE DRAINAGE, ASTM C-76, CLASS III, ALL DEPTHS, INCLUDES BEDDING AND BACKFILL, COMPLETE IN PLACE	LF	818	\$62.00	\$50,716.00
32.	TYPE "A" INLET FOR SWALE DRAINAGE, ALL DEPTHS, INCLUDES SILT BARRIER FENCE, COMPLETE IN PLACE	EA	2	\$1,400.00	\$2,800.00
33.	TYPE "C" MANHOLE FOR 42" STORM SEWERS AND SMALLER FOR SWALE DRAINAGE, ALL DEPTHS, COMPLETE IN PLACE	EA	1	\$2,000.00	\$2,000.00
34.	CORE INTO EXISTING STORM SEWER MANHOLE AND CONNECT PROPOSED STORM SEWER PIPE, INCLUDING ALL SEALS AND APPURTENANCES NECESSARY, COMPLETE IN PLACE	EA	1	\$700.00	\$700.00
35.	DEMUCK EXISTING DRAINAGE SWALES FOR FILL, AS DIRECTED BY ENGINEER, COMPLETE IN PLACE	LF	835	\$2.00	\$1,670.00
36.	REMOVE AND REPLACE EXISTING SIDEWALK AFTER STORM SEWER CONSTRUCTION, COMPLETE IN PLACE	LF	85	\$150.00	\$12,750.00
37.	TEMPORARY REMOVAL OF EXISTING TYPE III BARRICADE FOR MOBILIZATION, BARRICADE TO BE REINSTALLED ONCE ON-SITE, COMPLETE IN PLACE	EA	1	\$400.00	\$400.00
38.	TEMPORARY REMOVAL OF EXISTING TYPE III BARRICADE FOR DEMOBILIZATION, BARRICADE TO BE REINSTALLED ONCE OFF-SITE, COMPLETE IN PLACE	EA	1	\$400.00	\$400.00
39.	PROPOSED SWALE PER EXHIBIT, INCLUDING HYDROMULCH, COMPLETE IN PLACE	LF	1,120	\$4.00	\$4,480.00
40.	AS BUILT SURVEY OF STOCKPILE NO. 2, MUST BE DONE BY GBI PARTNERS, LP, 713.955.1306, AND MUST BE SUBMITTED TO ENGINEER FOR REVIEW AND APPROVAL, PRIOR TO PAYMENT, COMPLETE IN PLACE	LS	1	\$1,100.00	\$1,100.00
<b>SUBTOTAL DRAINAGE FACILITIES ITEMS</b>					<b>\$1,055,244.40</b>
<b>BID SUMMARY</b>					
SUBTOTAL WATER SYSTEM ITEMS					\$229,529.00
SUBTOTAL SANITARY SEWER FACILITIES					\$443,740.05
SUBTOTAL DRAINAGE FACILITIES ITEMS					\$1,055,244.40
<b>TOTAL AMOUNT BID</b>					<b>\$1,728,513.45</b>