

BID TABULATION FOR:

CONSTRUCTION OF THE WATER PLANT NO. 1 TEST WELL TO SERVE FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 238
FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 238
FORT BEND COUNTY, TEXAS
OCTOBER 01, 2026
LJA, INC.
D. FORREST
OCTOBER 01, 2026
2791-15101 (9.2)

BID OPENING DATE:

BID OPENING LOCATION:


TABULATION BY:

TABULATION DATE:

LJA JOB NO.

BIDDER NAME	BASE BID	ALTERNATE BID PLUS BASE BID
1) J&S WATER WELLS	\$742,500.00	\$737,000.00
2) WEISINGER INCORPORATED	\$1,206,100.00	NO BID

CALENDAR DAYS - 90/10

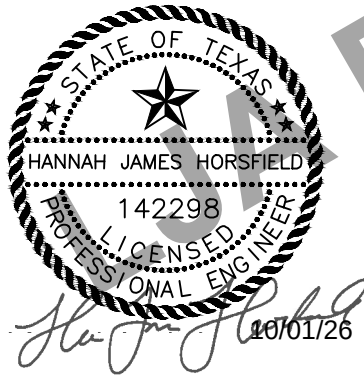

I, Hannah J. Horsfield, P.E., hereby certify these bid tabulations to be true and correct.

BID TABULATION FOR:

BID OPENING DATE:
BID OPENING LOCATION:
TABULATION BY:
TABULATION DATE:
LJA JOB NO.

CONSTRUCTION OF THE WATER PLANT NO. 1 TEST WELL TO SERVE FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 238

FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 238
FORT BEND COUNTY, TEXAS
OCTOBER 01, 2026
LJA, INC.
D. FORREST
OCTOBER 01, 2026
2791-15101 (9.2)

				1) J&S WATER WELLS		2) WEISINGER INCORPORATED	
NO.	ITEM DESCRIPTION	UNIT	QTY	UNIT COST	TOTAL	UNIT COST	TOTAL
BASE BID TEST HOLE BASE BID ITEMS							
1.	CONSTRUCT CONTRACTOR WATER SUPPLY WELL IN THE VICINITY OF THE TEST HOLE WITH MINIMUM 4-INCH PVC PRESSURE CEMENTED WELL CASING AND 2 1/2-INCH PVC SCREEN (AND A SECURE LOCKABLE CAP POST CONSTRUCTION), FURNISH AND REMOVE ALL NECESSARY TEMPORARY PUMPING EQUIPMENT, PIPING AND APPURTENANCES TO PROVIDE A POTABLE WATER SUPPLY FOR THE TEST HOLE AND TEST WELL DRILLING AND CONSTRUCTION OPERATIONS, COMPLETE IN PLACE, IN ACCORDANCE WITH THE SPECIFICATIONS.	LS	1	\$30,000.00	\$30,000.00	\$30,000.00	\$30,000.00
2.	FURNISH ALL MATERIALS, EQUIPMENT, LABOR AND INCIDENTALS NECESSARY TO DRILL, COLLECT DRILL CUTTING SAMPLE AND PERFORM SIEVE ANALYSES, AND LOG TEST HOLE INCLUDING PERFORMING GEOPHYSICAL LOGGING TO DEPTH OF 1700 FEET, COMPLETE IN PLACE, IN ACCORDANCE WITH THE SPECIFICATIONS.	LS	1	\$450,000.00	\$450,000.00	\$530,100.00	\$530,100.00
3.	ADD OR DEDUCT FOR CHANGES TO 1,700-FEET DRILL AND LOG THE TEST HOLE (TO BE USED ONLY AS DIRECTED BY ENGINEER), COMPLETE IN PLACE, IN ACCORDANCE WITH THE SPECIFICATIONS.	VF	10	\$250.00	\$2,500.00	\$100.00	\$1,000.00
SUBTOTAL BASE BID TEST HOLE BASE BID ITEMS					\$482,500.00		\$561,100.00
BASE BID TEMPORARY TEST WELL OPTION BASE BID ITEMS							
1.	FURNISH ALL MATERIALS, EQUIPMENT, LABOR, AND INCIDENTALS NECESSARY TO DRILL, INSTALL, PUMP, TEST AND REMOVE A TEMPORARY TEST WELL WITH 6-INCH DIAMETER STEEL CASING AND MINIMUM 4 1/2-INCH DIAMETER CASING AND 20 TO 40 FEET OF MINIMUM 4 1/2-INCH DIAMETER WELL SCREEN AND GRAVEL PACK AT A TOTAL TEMPORARY TEST WELL DEPTH BETWEEN 800- FEET AND 1,300- FEET IN THE TEST HOLE AND COLLECT AND ANALYZE WATER SAMPLES, COMPLETE IN PLACE, IN ACCORDANCE WITH THE SPECIFICATIONS.	EA	2	\$60,000.00	\$120,000.00	\$150,000.00	\$300,000.00
2.	FURNISH ALL MATERIALS, EQUIPMENT, LABOR, AND INCIDENTALS NECESSARY TO DRILL, INSTALL, PUMP, TEST AND REMOVE A TEMPORARY TEST WELL WITH 6-INCH DIAMETER STEEL CASING AND MINIMUM 4 1/2-INCH DIAMETER CASING AND 20 TO 40- FEET MINIMUM 4 1/2-INCH DIAMETER WELL SCREEN AND GRAVEL PACK AT A TOTAL TEMPORARY TEST WELL DEPTH BETWEEN 400 AND 799- FEET IN THE TEST HOLE AND COLLECT AND ANALYZE WATER SAMPLES, COMPLETE IN PLACE, IN ACCORDANCE WITH THE SPECIFICATIONS.	EA	2	\$50,000.00	\$100,000.00	\$135,000.00	\$270,000.00
3.	PLUG AND ABANDON THE TEST HOLE, AS FOLLOWS AND DIRECTED BY THE ENGINEER: FURNISH AND INSTALL A MINIMUM OF 100 SACKS OF CEMENT PLUS BENTONITE IN PART OF THE DEPTH INTERVAL BETWEEN 400 AND 1,300- FEET AND CEMENT FROM 5 TO 20- FEET BELOW LAND SURFACE, AND COMPLETE AND SUBMIT TEST HOLE PLUGGING REPORT, COMPLETE IN PLACE, IN ACCORDANCE WITH TDLR AND TCEQ RULES AND REQUIREMENTS, AND SPECIFICATIONS.	LS	1	\$10,000.00	\$10,000.00	\$45,000.00	\$45,000.00
4.	ECONOMIC INCENTIVE FOR EARLY COMPLETION OF THE PROJECT, INCLUDING COMPLETION OF ALL WATER SAMPLE ANALYSES, AS DEFINED IN THE CONTRACT, AND RESULTS ACCEPTED BY ENGINEER (30 DAYS MAXIMUM).	DAY	30	\$1,000.00	\$30,000.00	\$1,000.00	\$30,000.00
SUBTOTAL BASE BID TEMPORARY TEST WELL OPTION BASE BID ITEMS					\$260,000.00		\$645,000.00

BID TABULATION FOR:

BID OPENING DATE:
BID OPENING LOCATION:
TABULATION BY:
TABULATION DATE:
LJA JOB NO.

CONSTRUCTION OF THE WATER PLANT NO. 1 TEST WELL TO SERVE FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 238

FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 238
FORT BEND COUNTY, TEXAS
OCTOBER 01, 2026
LJA, INC.
D. FORREST
OCTOBER 01, 2026
2791-15101 (9.2)

				1) J&S WATER WELLS		2) WEISINGER INCORPORATED	
NO.	ITEM DESCRIPTION	UNIT	QTY	UNIT COST	TOTAL	UNIT COST	TOTAL
ALTERNATE BID PVC TEST WELL OPTION							
1.	FURNISH NEW MATERIALS AND CONSTRUCT PVC TEST WELL IN THE TEST HOLE WITH 700- FEET OF 5-INCH SDR-17 PVC WELL CASING INSTALLED IN A MINIMUM 8 3/4-INCH REAMED HOLE THAT IS PRESSURE CEMENTED AND 40- FEET OF 2 1/2-INCH PVC WELL SCREEN, AND FURNISH ALL NECESSARY PUMPING EQUIPMENT, PIPING AND APPURTENANCES AND COMPLETE TEST WELL DEVELOPMENT AND TESTING OPERATIONS WITH AIRLIFT AND SUBMERSIBLE PUMPING EQUIPMENT, COLLECT WATER SAMPLES AND LABORATORY ANALYSIS, COMPLETE IN PLACE, ACCORDING TO SPECIFICATIONS.	LS	1	\$95,000.00	\$95,000.00	NO BID	NO BID
2.	FURNISH NEW MATERIALS AND CONSTRUCT PVC TEST WELL IN THE TEST HOLE WITH 500- FEET OF 5-INCH SDR-17 PVC WELL CASING INSTALLED IN A MINIMUM 8 3/4-INCH REAMED HOLE THAT IS PRESSURE CEMENTED AND 40- FEET OF 2 1/2-INCH PVC WELL SCREEN, AND FURNISH ALL NECESSARY PUMPING EQUIPMENT, PIPING AND APPURTENANCES AND COMPLETE TEST WELL DEVELOPMENT AND TESTING OPERATIONS WITH AIRLIFT AND SUBMERSIBLE PUMPING EQUIPMENT, COLLECT WATER SAMPLES AND LABORATORY ANALYSIS, COMPLETE IN PLACE, ACCORDING TO SPECIFICATIONS.	LS	1	\$90,000.00	\$90,000.00	NO BID	NO BID
3.	FURNISH AND INSTALL ONE CEMENT PLUG IN THE TEST HOLE PRIOR TO CONSTRUCTING A PVC TEST WELL AS FOLLOWS AND DIRECTED BY ENGINEER: 30-SACK CEMENT PLUG IN PART OF THE DEPTH INTERVAL BETWEEN 400 AND 1,200- FEET, COMPLETE IN PLACE, IN ACCORDANCE WITH SPECIFICATIONS.	EA	2	\$7,500.00	\$15,000.00	NO BID	NO BID
4.	PLUG AND ABANDON A PVC TEST WELL, AS FOLLOWS AND DIRECTED BY THE ENGINEER: CUT OFF THE TOP 5- FEET OF THE PVC TEST WELL CASING AND FURNISH AND INSTALL MINIMUM 50 SACKS OF CEMENT PLUS BENTONITE IN THE PVC WELL CASING AND/OR WELL SCREEN SECTION(S) IN PART OF THE DEPTH INTERVAL FROM 300 TO 800 FEET AND CEMENT PLUG FROM 5 TO 20 FEET BELOW LAND SURFACE, AND COMPLETE AND SUBMIT A TEST WELL PLUGGING REPORT, COMPLETE IN PLACE, IN ACCORDANCE WITH TDLR AND TCEQ RULES AND REQUIREMENTS, AND SPECIFICATIONS.	EA	2	\$7,500.00	\$15,000.00	NO BID	NO BID
5.	ADD OR DEDUCT FOR CHANGES TO REAM HOLE (TO BE USED ONLY AS DIRECTED BY ENGINEER), FURNISH AND INSTALL AND CEMENT 5-INCH SDR-17 PVC WELL CASING MORE OR LESS THAN 700 FEET, COMPLETE IN PLACE, IN ACCORDANCE WITH THE SPECIFICATIONS.	VF	10	\$300.00	\$3,000.00	NO BID	NO BID
6.	ADD OR DEDUCT FOR CHANGES TO REAM HOLE (TO BE USED ONLY AS DIRECTED BY ENGINEER), FURNISH AND INSTALL AND CEMENT 5-INCH SDR-17 PVC WELL CASING MORE OR LESS THAN 500 FEET, COMPLETE IN PLACE, IN ACCORDANCE WITH THE SPECIFICATIONS.	VF	10	\$300.00	\$3,000.00	NO BID	NO BID
7.	ADD OR DEDUCT FOR CHANGES TO REAM HOLE (TO BE USED ONLY AS DIRECTED BY ENGINEER), FURNISH AND INSTALL 2 1/2-INCH PVC WELL SCREEN (SCHEDULE 40) MORE OR LESS THAN 40 FEET, COMPLETE IN PLACE, IN ACCORDANCE WITH THE SPECIFICATIONS.	VF	10	\$350.00	\$3,500.00	NO BID	NO BID
SUBTOTAL ALTERNATE BID PVC TEST WELL OPTION					\$224,500.00		NO BID
BID SUMMARY							
BASE BID TEST HOLE BASE BID ITEMS					\$482,500.00		\$561,100.00
BASE BID TEMPORARY TEST WELL OPTION BASE BID ITEMS					\$260,000.00		\$645,000.00
TOTAL AMOUNT BASE BID					\$742,500.00		\$1,206,100.00

BID TABULATION FOR:

BID OPENING DATE:
BID OPENING LOCATION:
TABULATION BY:
TABULATION DATE:
LJA JOB NO.

CONSTRUCTION OF THE WATER PLANT NO. 1 TEST WELL TO SERVE FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 238

FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 238
FORT BEND COUNTY, TEXAS
OCTOBER 01, 2026
LJA, INC.
D. FORREST
OCTOBER 01, 2026
2791-15101 (9.2)

				1) J&S WATER WELLS		2) WEISINGER INCORPORATED	
NO.	ITEM DESCRIPTION	UNIT	QTY	UNIT COST	TOTAL	UNIT COST	TOTAL

ALTERNATE BID

TOTAL AMOUNT BASE BID		\$742,500.00	\$1,206,100.00
DEDUCT TEMPORARY TEST WELL OPTION BASE BID ITEMS ITEM NO. 1		-\$120,000.00	-\$300,000.00
DEDUCT TEMPORARY TEST WELL OPTION BASE BID ITEMS ITEM NO. 2		-\$100,000.00	-\$270,000.00
DEDUCT TEMPORARY TEST WELL OPTION BASE BID ITEMS ITEM NO. 3		-\$10,000.00	-\$45,000.00
PVC TEST WELL OPTION		\$224,500.00	NO BID
TOTAL ALTERNATE BID PLUS BASE BID		\$737,000.00	NO BID

LJA Engineering, Inc.