

**BID TABULATION FOR:****BID OPENING DATE:****BID OPENING LOCATION:****TABULATION BY:****TABULATION DATE:****LJA JOB NO.**


CONSTRUCTION OF THE PAVING AND APPURTENANCES  
TO SERVE TALON RIDGE SECTION 2  
FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 273  
FORT BEND COUNTY, TEXAS  
DECEMBER 11, 2025  
LJA ENGINEERING, INC.  
S. YOUNG  
DECEMBER 11, 2025  
5690-1101 (9.2)

BIDDER NAME	BASE BID
1) DIMAS BROS. CONSTRUCTION	\$1,299,373.50
2) D&J CONSTRUCTION, INC	\$1,322,464.00
3) HURTADO CONSTRUCTION COMPANY	\$1,378,888.88
4) REXCON ENTERPRISES	\$1,385,402.90
5) R CONSTRUCTION CIVIL, LLC	\$1,395,505.75
6) ALLGOOD CONSTRUCTION COMPANY, INC.	\$1,418,662.39
7) DNT CONSTRUCTION LLC	\$1,440,000.00
8) PRECISE SERVICES INC.	\$1,620,000.00

CALENDAR DAYS 75/90



I, TUCKER NOVOSAD, P.E., hereby certify these bid tabulations to be true and correct.

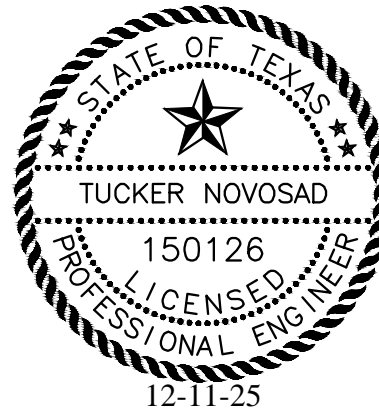

**BID TABULATION FOR:**

**BID OPENING DATE:**  
**BID OPENING LOCATION:**  
**TABULATION BY:**  
**TABULATION DATE:**  
**LJA JOB NO.**

**CONSTRUCTION OF THE PAVING AND APPURTENANCES  
 TO SERVE TALON RIDGE SECTION 2  
 FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 273  
 FORT BEND COUNTY, TEXAS  
 DECEMBER 11, 2025  
 LJA ENGINEERING, INC.  
 S. YOUNG  
 DECEMBER 11, 2025  
 5690-1101 (9.2)**

				1) DIMAS BROS. CONSTRUCTION		2) D&J CONSTRUCTION, INC		3) HURTADO CONSTRUCTION COMPANY		4) REXCON ENTERPRISES	
NO.	ITEM DESCRIPTION	UNIT	QTY	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
PAVING ITEMS											
1.	6" REINFORCED CONCRETE PAVEMENT, COMPLETE IN PLACE	SY	16805	\$51.00	\$857,055.00	\$47.15	\$792,355.75	\$54.00	\$907,470.00	\$49.00	\$823,445.00
2.	8" LIME STABILIZED SUBGRADE MANIPULATION, COMPLETE IN PLACE	SY	18997	\$3.60	\$68,389.20	\$3.50	\$66,489.50	\$3.28	\$62,310.16	\$3.75	\$71,238.75
3.	HYDRATED LIME FOR 8" STABILIZED SUBGRADE PREPARATION, 8% BY DRY WEIGHT, AS REQUIRED BY SOIL CONDITIONS AND APPROVED BY GEOTECHNICAL ENGINEER, COMPLETE IN PLACE	TON	502	\$330.00	\$165,660.00	\$357.00	\$179,214.00	\$358.00	\$179,716.00	\$355.00	\$178,210.00
4.	3" TYPE "D" HOT MIX ASPHALT PAVEMENT TEMPORARY TURNAROUND WITH 8" BLACK BASE AND PRIME COAT AND 8" LIME STABILIZED SUBGRADE, AS DIRECTED BY ENGINEER, COMPLETE IN PLACE	SY	680	\$5.00	\$3,400.00	\$125.00	\$85,000.00	\$10.00	\$6,800.00	\$148.00	\$100,640.00
5.	6" REINFORCED CONCRETE CURB, COMPLETE IN PLACE	LF	3513	\$3.55	\$12,471.15	\$3.75	\$13,173.75	\$3.88	\$13,630.44	\$3.15	\$11,065.95
6.	4" X 12" REINFORCED CONCRETE CURB, COMPLETE IN PLACE	LF	6308	\$3.60	\$22,708.80	\$3.75	\$23,655.00	\$3.88	\$24,475.04	\$3.15	\$19,870.20
7.	TYPE 7 ADA RAMPS, INCLUDES TRUNCATED DOME PAVERS WITH CONTRASTING COLOR PER DETAIL, COMPLETE IN PLACE	EA	18	\$1,484.00	\$26,712.00	\$1,200.00	\$21,600.00	\$1,588.00	\$28,584.00	\$1,825.00	\$32,850.00
8.	2' FULL DEPTH SAWCUT OF EXISTING ASPHALT EDGE AND CONNECT PROPOSED 6" CONCRETE PAVEMENT, COMPLETE IN PLACE	LF	28	\$35.00	\$980.00	\$20.00	\$560.00	\$18.00	\$504.00	\$70.00	\$1,960.00
9.	REINFORCED CONCRETE PAVING HEADER, COMPLETE IN PLACE	LF	28	\$30.00	\$840.00	\$15.00	\$420.00	\$28.00	\$784.00	\$33.00	\$924.00
10.	REMOVE AND OFFSITE DISPOSAL OF EXISTING TYPE III BARRICADE, COMPLETE IN PLACE	EA	2	\$1.00	\$2.00	\$1.00	\$2.00	\$0.01	\$0.02	\$375.00	\$750.00
11.	TYPE III BARRICADE, COMPLETE IN PLACE	EA	1	\$1,275.00	\$1,275.00	\$1,400.00	\$1,400.00	\$8.00	\$8.00	\$1,175.00	\$1,175.00
12.	4" SQUARE DOUBLE REFLECTORIZED BLUE TRAFFIC BUTTONS FOR FIRE HYDRANT LOCATION, COMPLETE IN PLACE	EA	14	\$20.00	\$280.00	\$15.00	\$210.00	\$18.00	\$252.00	\$15.00	\$210.00
13.	REMOVE & DISPOSE OF EXISTING 3" TYPE "D" HOT MIX ASPHALT PAVEMENT TEMPORARY TURNAROUND WITH 8" BLACK BASE AND PRIME COAT AND 8" LIME STABILIZED SUBGRADE, AS DIRECTED BY ENGINEER, COMPLETE IN PLACE	SY	680	\$1.00	\$680.00	\$12.00	\$8,160.00	\$1.00	\$680.00	\$7.00	\$4,760.00
14.	FINAL LOT GRADING, INCLUDING STRIPPING AND PROOFROLLING, EXCAVATION, HAULING, PLACEMENT AND COMPACTION OF MATERIALS, AND PLACEMENT OF STRIPPINGS, COMPLETE IN PLACE	EA	154	\$300.00	\$46,200.00	\$125.00	\$19,250.00	\$288.00	\$44,352.00	\$275.00	\$42,350.00
15.	FINAL RESERVE GRADING, INCLUDING STRIPPING AND PROOFROLLING, EXCAVATION, HAULING, PLACEMENT, AND COMPACTION OF MATERIALS, AND PLACEMENT OF STRIPPINGS, COMPLETE IN PLACE	EA	4	\$300.00	\$1,200.00	\$1,000.00	\$4,000.00	\$288.00	\$1,152.00	\$1,000.00	\$4,000.00
16.	ROADWAY EXCAVATION, INCLUDES STRIPPING, STOCKPILING AND RE-APPLICATION OF STRIPPINGS TO APPLICABLE AREAS, COMPLETE IN PLACE	CY	1928	\$5.00	\$9,640.00	\$8.00	\$15,424.00	\$3.75	\$7,230.00	\$3.50	\$6,748.00
17.	PERMANENT TRAFFIC CONTROL DEVICES, INCLUDES ALL TRAFFIC BUTTONS, PAVEMENT STRIPING, MARKERS, REFLECTIVE PAINT ON MEDIAN NOSES, STREET SIGNS, TRAFFIC SIGNS, ETC., COMPLETE IN PLACE	LS	1	\$12,000.00	\$12,000.00	\$11,000.00	\$11,000.00	\$14,397.22	\$14,397.22	\$17,500.00	\$17,500.00
18.	FORT BEND COUNTY CONSTRUCTION PERMIT FOR CONSTRUCTION OF PAVING IMPROVEMENTS, INCLUDES BONDS, COMPLETE IN PLACE	LS	1	\$3,000.00	\$3,000.00	\$1,500.00	\$1,500.00	\$17,620.00	\$17,620.00	\$5,000.00	\$5,000.00

BID TABULATION FOR:

BID OPENING DATE:  
BID OPENING LOCATION:  
TABULATION BY:  
TABULATION DATE:  
LJA JOB NO.

CONSTRUCTION OF THE PAVING AND APPURTENANCES  
TO SERVE TALON RIDGE SECTION 2  
FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 273  
FORT BEND COUNTY, TEXAS  
DECEMBER 11, 2025  
LJA ENGINEERING, INC.  
S. YOUNG  
DECEMBER 11, 2025  
5690-1101 (9.2)

				1) DIMAS BROS. CONSTRUCTION		2) D&J CONSTRUCTION, INC		3) HURTADO CONSTRUCTION COMPANY		4) REXCON ENTERPRISES	
NO.	ITEM DESCRIPTION	UNIT	QTY	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
19.	6" PVC IRRIGATION SLEEVE, SCHEDULE 40, COMPLETE IN PLACE	LF	192	\$35.00	\$6,720.00	\$35.00	\$6,720.00	\$32.00	\$6,144.00	\$28.00	\$5,376.00
20.	AS-BUILT SURVEY OF ALL PAVEMENT HIGH POINT AND LOW POINTS, RESERVES, INCLUDING AN EXHIBIT CERTIFIED BY A REGISTERED PROFESSIONAL LAND SURVEYOR IN THE STATE OF TEXAS, AS WELL AS AN AUTOCAD FILE OF SURVEY, (AS DIRECTED BY ENGINEER), COMPLETE IN PLACE	LS	1	\$3,830.35	\$3,830.35	\$6,000.00	\$6,000.00	\$5,700.00	\$5,700.00	\$3,500.00	\$3,500.00
SUBTOTAL PAVING ITEMS					\$1,243,043.50		\$1,256,134.00		\$1,321,808.88		\$1,331,572.90
MISCELLANEOUS ITEMS											
1.	5" REINFORCED CONCRETE SLOPE PAVEMENT WITH TOE WALLS ALL AROUND, COMPLETE IN PLACE	SY	250	\$95.00	\$23,750.00	\$135.00	\$33,750.00	\$98.00	\$24,500.00	\$85.00	\$21,250.00
2.	BROADCAST SEEDING, INCLUDES FERTILIZING AND WATERING, TO ACHIEVE 90% HOMOGENEOUS GRASS COVERAGE, (AS DIRECTED BY ENGINEER), COMPLETE IN PLACE	AC	14	\$600.00	\$8,400.00	\$600.00	\$8,400.00	\$600.00	\$8,400.00	\$600.00	\$8,400.00
3.	HYDROMULCH SEEDING AND FINE GRADING, INCLUDES WATERING, TO ACHIEVE 90% HOMOGENEOUS GRASS COVERAGE, (AS DIRECTED BY ENGINEER), COMPLETE IN PLACE	AC	6	\$1,200.00	\$7,200.00	\$1,200.00	\$7,200.00	\$1,200.00	\$7,200.00	\$1,200.00	\$7,200.00
4.	FULL CONSTRUCTION STAKING FOR PAVING AND APPURTENANCES ITEMS, COORDINATE WITH LJA SURVEYING, INC., AARON G. FERGUSON, 713.953.5196, COMPLETE IN PLACE	LS	1	\$14,730.00	\$14,730.00	\$14,730.00	\$14,730.00	\$14,730.00	\$14,730.00	\$14,730.00	\$14,730.00
5.	EXTRA SURVEYING TRIP FOR RESTAKING PREVIOUSLY PROVIDED CONSTRUCTION STAKES THAT WERE DESTROYED BY OTHERS (THIS ITEM DOES NOT INCLUDE RESTAKING DUE TO CONTRACTOR DESTROYING OWN CONSTRUCTION STAKING OR FAILING TO PROTECT CONSTRUCTION STAKING FROM KNOWN HAZARDS SUCH AS CONSTRUCTION TRAFFIC, ORDERING STAKING TOO FAR IN ADVANCE, OR CONTRACTOR'S OWN EQUIPMENT, ETC.)	DAY	1	\$2,250.00	\$2,250.00	\$2,250.00	\$2,250.00	\$2,250.00	\$2,250.00	\$2,250.00	\$2,250.00
SUBTOTAL MISCELLANEOUS ITEMS					\$56,330.00		\$66,330.00		\$57,080.00		\$53,830.00
BID SUMMARY											
PAVING ITEMS					\$1,243,043.50		\$1,256,134.00		\$1,321,808.88		\$1,331,572.90
MISCELLANEOUS ITEMS					\$56,330.00		\$66,330.00		\$57,080.00		\$53,830.00
TOTAL AMOUNT BASE BID					\$1,299,373.50		\$1,322,464.00		\$1,378,888.88		\$1,385,402.90

**BID TABULATION FOR:**

**BID OPENING DATE:**  
**BID OPENING LOCATION:**  
**TABULATION BY:**  
**TABULATION DATE:**  
**LJA JOB NO.**

**CONSTRUCTION OF THE PAVING AND APPURTENANCES  
 TO SERVE TALON RIDGE SECTION 2  
 FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 273  
 FORT BEND COUNTY, TEXAS  
 DECEMBER 11, 2025  
 LJA ENGINEERING, INC.  
 S. YOUNG  
 DECEMBER 11, 2025  
 5690-1101 (9.2)**

				5) R CONSTRUCTION CIVIL, LLC		6) ALLGOOD CONSTRUCTION COMPANY, INC.		7) DNT CONSTRUCTION LLC		8) PRECISE SERVICES INC.	
NO.	ITEM DESCRIPTION	UNIT	QTY	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
PAVING ITEMS											
1.	6" REINFORCED CONCRETE PAVEMENT, COMPLETE IN PLACE	SY	16805	\$47.00	\$789,835.00	\$49.20	\$826,806.00	\$49.20	\$826,806.00	\$57.50	\$966,287.50
2.	8" LIME STABILIZED SUBGRADE MANIPULATION, COMPLETE IN PLACE	SY	18997	\$3.75	\$71,238.75	\$3.31	\$62,880.07	\$5.00	\$94,985.00	\$4.85	\$92,135.45
3.	HYDRATED LIME FOR 8" STABILIZED SUBGRADE PREPARATION, 8% BY DRY WEIGHT, AS REQUIRED BY SOIL CONDITIONS AND APPROVED BY GEOTECHNICAL ENGINEER, COMPLETE IN PLACE	TON	502	\$330.00	\$165,660.00	\$403.20	\$202,406.40	\$366.00	\$183,732.00	\$360.00	\$180,720.00
4.	3" TYPE "D" HOT MIX ASPHALT PAVEMENT TEMPORARY TURNAROUND WITH 8" BLACK BASE AND PRIME COAT AND 8" LIME STABILIZED SUBGRADE, AS DIRECTED BY ENGINEER, COMPLETE IN PLACE	SY	680	\$235.00	\$159,800.00	\$103.71	\$70,522.80	\$160.00	\$108,800.00	\$160.00	\$108,800.00
5.	6" REINFORCED CONCRETE CURB, COMPLETE IN PLACE	LF	3513	\$4.00	\$14,052.00	\$3.12	\$10,960.56	\$5.00	\$17,565.00	\$5.00	\$17,565.00
6.	4" X 12" REINFORCED CONCRETE CURB, COMPLETE IN PLACE	LF	6308	\$4.00	\$25,232.00	\$3.12	\$19,680.96	\$5.00	\$31,540.00	\$5.00	\$31,540.00
7.	TYPE 7 ADA RAMPS, INCLUDES TRUNCATED DOME PAVERS WITH CONTRASTING COLOR PER DETAIL, COMPLETE IN PLACE	EA	18	\$1,700.00	\$30,600.00	\$720.00	\$12,960.00	\$2,050.00	\$36,900.00	\$1,450.00	\$26,100.00
8.	2' FULL DEPTH SAWCUT OF EXISTING ASPHALT EDGE AND CONNECT PROPOSED 6" CONCRETE PAVEMENT, COMPLETE IN PLACE	LF	28	\$42.00	\$1,176.00	\$18.00	\$504.00	\$27.00	\$756.00	\$42.00	\$1,176.00
9.	REINFORCED CONCRETE PAVING HEADER, COMPLETE IN PLACE	LF	28	\$21.00	\$588.00	\$6.60	\$184.80	\$5.50	\$154.00	\$25.00	\$700.00
10.	REMOVE AND OFFSITE DISPOSAL OF EXISTING TYPE III BARRICADE, COMPLETE IN PLACE	EA	2	\$1.00	\$2.00	\$180.00	\$360.00	\$250.00	\$500.00	\$100.00	\$200.00
11.	TYPE III BARRICADE, COMPLETE IN PLACE	EA	1	\$1,200.00	\$1,200.00	\$960.00	\$960.00	\$1,295.00	\$1,295.00	\$1,600.00	\$1,600.00
12.	4" SQUARE DOUBLE REFLECTORIZED BLUE TRAFFIC BUTTONS FOR FIRE HYDRANT LOCATION, COMPLETE IN PLACE	EA	14	\$15.00	\$210.00	\$18.00	\$252.00	\$16.00	\$224.00	\$20.00	\$280.00
13.	REMOVE & DISPOSE OF EXISTING 3" TYPE "D" HOT MIX ASPHALT PAVEMENT TEMPORARY TURNAROUND WITH 8" BLACK BASE AND PRIME COAT AND 8" LIME STABILIZED SUBGRADE, AS DIRECTED BY ENGINEER, COMPLETE IN PLACE	SY	680	\$8.50	\$5,780.00	\$12.00	\$8,160.00	\$9.50	\$6,460.00	\$16.50	\$11,220.00
14.	FINAL LOT GRADING, INCLUDING STRIPPING AND PROOFROLLING, EXCAVATION, HAULING, PLACEMENT AND COMPACTION OF MATERIALS, AND PLACEMENT OF STRIPPINGS, COMPLETE IN PLACE	EA	154	\$175.00	\$26,950.00	\$432.00	\$66,528.00	\$105.00	\$16,170.00	\$235.00	\$36,190.00
15.	FINAL RESERVE GRADING, INCLUDING STRIPPING AND PROOFROLLING, EXCAVATION, HAULING, PLACEMENT, AND COMPACTION OF MATERIALS, AND PLACEMENT OF STRIPPINGS, COMPLETE IN PLACE	EA	4	\$425.00	\$1,700.00	\$432.00	\$1,728.00	\$700.00	\$2,800.00	\$825.00	\$3,300.00
16.	ROADWAY EXCAVATION, INCLUDES STRIPPING, STOCKPILING AND RE-APPLICATION OF STRIPPINGS TO APPLICABLE AREAS, COMPLETE IN PLACE	CY	1928	\$4.25	\$8,194.00	\$6.00	\$11,568.00	\$2.50	\$4,820.00	\$7.00	\$13,496.00
17.	PERMANENT TRAFFIC CONTROL DEVICES, INCLUDES ALL TRAFFIC BUTTONS, PAVEMENT STRIPING, MARKERS, REFLECTIVE PAINT ON MEDIAN NOSES, STREET SIGNS, TRAFFIC SIGNS, ETC., COMPLETE IN PLACE	LS	1	\$16,100.00	\$16,100.00	\$4,200.00	\$4,200.00	\$18,000.00	\$18,000.00	\$20,280.05	\$20,280.05
18.	FORT BEND COUNTY CONSTRUCTION PERMIT FOR CONSTRUCTION OF PAVING IMPROVEMENTS, INCLUDES BONDS, COMPLETE IN PLACE	LS	1	\$5,000.00	\$5,000.00	\$45,000.00	\$45,000.00	\$3,850.00	\$3,850.00	\$19,000.00	\$19,000.00

BID TABULATION FOR:

BID OPENING DATE:  
BID OPENING LOCATION:  
TABULATION BY:  
TABULATION DATE:  
LJA JOB NO.

CONSTRUCTION OF THE PAVING AND APPURTENANCES  
TO SERVE TALON RIDGE SECTION 2  
FORT BEND COUNTY MUNICIPAL UTILITY DISTRICT NO. 273  
FORT BEND COUNTY, TEXAS  
DECEMBER 11, 2025  
LJA ENGINEERING, INC.  
S. YOUNG  
DECEMBER 11, 2025  
5690-1101 (9.2)

				5) R CONSTRUCTION CIVIL, LLC		6) ALLGOOD CONSTRUCTION COMPANY, INC.		7) DNT CONSTRUCTION LLC		8) PRECISE SERVICES INC.	
NO.	ITEM DESCRIPTION	UNIT	QTY	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
19.	6" PVC IRRIGATION SLEEVE, SCHEDULE 40, COMPLETE IN PLACE	LF	192	\$24.00	\$4,608.00	\$32.40	\$6,220.80	\$25.00	\$4,800.00	\$52.50	\$10,080.00
20.	AS-BUILT SURVEY OF ALL PAVEMENT HIGH POINT AND LOW POINTS, RESERVES, INCLUDING AN EXHIBIT CERTIFIED BY A REGISTERED PROFESSIONAL LAND SURVEYOR IN THE STATE OF TEXAS, AS WELL AS AN AUTOCAD FILE OF SURVEY, (AS DIRECTED BY ENGINEER), COMPLETE IN PLACE	LS	1	\$5,500.00	\$5,500.00	\$4,200.00	\$4,200.00	\$18,963.00	\$18,963.00	\$9,250.00	\$9,250.00
SUBTOTAL PAVING ITEMS					\$1,333,425.75		\$1,356,082.39		\$1,379,120.00		\$1,549,920.00
MISCELLANEOUS ITEMS											
1.	5" REINFORCED CONCRETE SLOPE PAVEMENT WITH TOE WALLS ALL AROUND, COMPLETE IN PLACE	SY	250	\$118.00	\$29,500.00	\$120.00	\$30,000.00	\$100.00	\$25,000.00	\$150.00	\$37,500.00
2.	BROADCAST SEEDING, INCLUDES FERTILIZING AND WATERING, TO ACHIEVE 90% HOMOGENEOUS GRASS COVERAGE, (AS DIRECTED BY ENGINEER), COMPLETE IN PLACE	AC	14	\$600.00	\$8,400.00	\$600.00	\$8,400.00	\$600.00	\$8,400.00	\$600.00	\$8,400.00
3.	HYDROMULCH SEEDING AND FINE GRADING, INCLUDES WATERING, TO ACHIEVE 90% HOMOGENEOUS GRASS COVERAGE, (AS DIRECTED BY ENGINEER), COMPLETE IN PLACE	AC	6	\$1,200.00	\$7,200.00	\$1,200.00	\$7,200.00	\$1,750.00	\$10,500.00	\$1,200.00	\$7,200.00
4.	FULL CONSTRUCTION STAKING FOR PAVING AND APPURTENANCES ITEMS, COORDINATE WITH LJA SURVEYING, INC., AARON G. FERGUSON, 713.953.5196, COMPLETE IN PLACE	LS	1	\$14,730.00	\$14,730.00	\$14,730.00	\$14,730.00	\$14,730.00	\$14,730.00	\$14,730.00	\$14,730.00
5.	EXTRA SURVEYING TRIP FOR RESTAKING PREVIOUSLY PROVIDED CONSTRUCTION STAKES THAT WERE DESTROYED BY OTHERS (THIS ITEM DOES NOT INCLUDE RESTAKING DUE TO CONTRACTOR DESTROYING OWN CONSTRUCTION STAKING OR FAILING TO PROTECT CONSTRUCTION STAKING FROM KNOWN HAZARDS SUCH AS CONSTRUCTION TRAFFIC, ORDERING STAKING TOO FAR IN ADVANCE, OR CONTRACTOR'S OWN EQUIPMENT, ETC.)	DAY	1	\$2,250.00	\$2,250.00	\$2,250.00	\$2,250.00	\$2,250.00	\$2,250.00	\$2,250.00	\$2,250.00
SUBTOTAL MISCELLANEOUS ITEMS					\$62,080.00		\$62,580.00		\$60,880.00		\$70,080.00
BID SUMMARY											
PAVING ITEMS					\$1,333,425.75		\$1,356,082.39		\$1,379,120.00		\$1,549,920.00
MISCELLANEOUS ITEMS					\$62,080.00		\$62,580.00		\$60,880.00		\$70,080.00
TOTAL AMOUNT BASE BID					\$1,395,505.75		\$1,418,662.39		\$1,440,000.00		\$1,620,000.00