

BID TABULATION FOR:

CONSTRUCTION OF THE PAVING AND APPURTENANCES
TO SERVE LAKESIDE BAYOU SECTION 4
GALVESTON COUNTY MUNICIPAL UTILITY DISTRICT NO. 53
CITY OF TEXAS CITY, GALVESTON COUNTY, TEXAS
MAY 14, 2026
LJA ENGINEERING, INC.
S. YOUNG
MAY 14, 2026
7856-2914 (9.2)

BID OPENING DATE:

BID OPENING LOCATION:


TABULATION BY:

TABULATION DATE:

LJA JOB NO.

| BIDDER NAME | BASE BID |
|-------------------------------------|----------------|
| 1) DURWOOD GREENE CONSTRUCTION CO. | \$885,776.75 |
| 2) BEYER CONSTRUCTION, LLC | \$904,787.20 |
| 3) DECROSTA CONSTRUCTION | \$940,102.13 |
| 4) HARRIS CONSTRUCTION COMPANY, LLC | \$965,470.55 |
| 5) R CONSTRUCTION CIVIL, LLC | \$973,260.25 |
| 6) GMR TOTAL SERVICES, LLC | \$983,328.60 |
| 7) HCG | \$992,279.00 |
| 8) PRECISE SERVICES INC. | \$1,030,000.00 |

CALENDAR DAYS 40/50



5/15/26

A handwritten signature in black ink, appearing to read "Clayton C. Weishuhn", written over a horizontal line.

I, CLAYTON WEISHUHN, P.E., hereby certify these bid tabulations to be true and correct.

BID TABULATION FOR:

**CONSTRUCTION OF THE PAVING AND APPURTENANCES
TO SERVE LAKESIDE BAYOU SECTION 4
GALVESTON COUNTY MUNICIPAL UTILITY DISTRICT NO. 53
CITY OF TEXAS CITY, GALVESTON COUNTY, TEXAS
MAY 14, 2026
LJA ENGINEERING, INC.
S. YOUNG
MAY 14, 2026
7856-2914 (9.2)**

**BID OPENING DATE:
BID OPENING LOCATION:
TABULATION BY:
TABULATION DATE:
LJA JOB NO.**


| NO. | ITEM DESCRIPTION | UNIT | QTY | 1) DURWOOD GREENE CONSTRUCTION CO. | | 2) BEYER CONSTRUCTION, LLC | | 3) DECROSTA CONSTRUCTION | | 4) HARRIS CONSTRUCTION COMPANY, LLC | |
|--|---|------|-------|------------------------------------|---------------------|----------------------------|---------------------|--------------------------|---------------------|-------------------------------------|---------------------|
| | | | | UNIT COST | TOTAL | UNIT COST | TOTAL | UNIT COST | TOTAL | UNIT COST | TOTAL |
| PAVING IMPROVEMENT ITEMS | | | | | | | | | | | |
| 1. | ROADWAY EXCAVATION TO BE USED FOR FILL TO FINAL GRADE WITHIN THE PROJECT LIMITS, INCLUDES STRIPPING, STOCKPILING STRIPPINGS, PLACEMENT AND COMPACTION TO 95% STANDARD PROCTOR DENSITY, WITH MAXIMUM 8" LIFTS, AND RE-APPLICATION OF STRIPPINGS, COMPLETE IN PLACE | CY | 4637 | \$4.00 | \$18,548.00 | \$4.75 | \$22,025.75 | \$4.50 | \$20,866.50 | \$4.00 | \$18,548.00 |
| 2. | 8" LIME STABILIZED SUBGRADE MANIPULATION, COMPLETE IN PLACE | SY | 13910 | \$3.50 | \$48,685.00 | \$2.20 | \$30,602.00 | \$3.50 | \$48,685.00 | \$4.95 | \$68,854.50 |
| 3. | HYDRATED LIME FOR 8" STABILIZED SUBGRADE PREPARATION, 8% BY DRY WEIGHT, AS REQUIRED BY SOIL CONDITIONS AND APPROVED BY GEOTECHNICAL ENGINEER, COMPLETE IN PLACE | TON | 368 | \$356.00 | \$131,008.00 | \$330.00 | \$121,440.00 | \$355.00 | \$130,640.00 | \$375.00 | \$138,000.00 |
| 4. | 6" REINFORCED CONCRETE PAVEMENT, COMPLETE IN PLACE | SY | 12413 | \$48.00 | \$595,824.00 | \$49.65 | \$616,305.45 | \$50.26 | \$623,877.38 | \$51.25 | \$636,166.25 |
| 5. | 6" REINFORCED CONCRETE CURB, COMPLETE IN PLACE | LF | 2385 | \$3.25 | \$7,751.25 | \$4.50 | \$10,732.50 | \$3.75 | \$8,943.75 | \$3.60 | \$8,586.00 |
| 6. | 4" X 12" REINFORCED CONCRETE CURB, COMPLETE IN PLACE | LF | 4198 | \$3.25 | \$13,643.50 | \$4.50 | \$18,891.00 | \$3.75 | \$15,742.50 | \$3.60 | \$15,112.80 |
| 7. | STOP SIGNS WITH STREET NAMES, COMPLETE IN PLACE | EA | 7 | \$900.00 | \$6,300.00 | \$680.00 | \$4,760.00 | \$800.00 | \$5,600.00 | \$800.00 | \$5,600.00 |
| 8. | CONNECT PROPOSED 6" REINFORCED CONCRETE PAVEMENT TO EXISTING REINFORCED CONCRETE PAVEMENT, COMPLETE IN PLACE | LF | 56 | \$10.00 | \$560.00 | \$50.00 | \$2,800.00 | \$20.00 | \$1,120.00 | \$15.00 | \$840.00 |
| 9. | REINFORCED CONCRETE PAVING HEADER, COMPLETE IN PLACE | LF | 90 | \$10.00 | \$900.00 | \$19.00 | \$1,710.00 | \$15.00 | \$1,350.00 | \$12.00 | \$1,080.00 |
| 10. | TYPE III BARRICADE, COMPLETE IN PLACE | EA | 3 | \$1,500.00 | \$4,500.00 | \$1,360.00 | \$4,080.00 | \$1,200.00 | \$3,600.00 | \$1,425.00 | \$4,275.00 |
| 11. | REMOVE AND OFFSITE DISPOSAL OF EXISTING TYPE III BARRICADE, COMPLETE IN PLACE | EA | 2 | \$1.00 | \$2.00 | \$5.00 | \$10.00 | \$100.00 | \$200.00 | \$200.00 | \$400.00 |
| 12. | FINAL LOT AND RESERVE GRADING, COMPLETE IN PLACE | EA | 96 | \$124.00 | \$11,904.00 | \$200.00 | \$19,200.00 | \$200.00 | \$19,200.00 | \$145.00 | \$13,920.00 |
| 13. | ADA RAMPS, INCLUDES TRUNCATED DOME PAVERS WITH CONTRASTING COLOR PER DETAIL, COMPLETE IN PLACE | EA | 14 | \$1,600.00 | \$22,400.00 | \$1,290.00 | \$18,060.00 | \$1,500.00 | \$21,000.00 | \$1,875.00 | \$26,250.00 |
| 14. | 4" SQUARE DOUBLE REFLECTORIZED BLUE TRAFFIC BUTTONS FOR FIRE HYDRANT LOCATION, COMPLETE IN PLACE | EA | 7 | \$20.00 | \$140.00 | \$8.90 | \$62.30 | \$25.00 | \$175.00 | \$21.00 | \$147.00 |
| 15. | DOUBLE 3-INCH PVC ELECTRICAL CONDUIT, SCHEDULE 40 (GRAY), INCLUDES BENDS, FITTINGS, AND CEMENT STABILIZED SAND AT ALL PAVEMENT CROSSINGS, COMPLETE IN PLACE | LF | 260 | \$34.00 | \$8,840.00 | \$37.00 | \$9,620.00 | \$45.00 | \$11,700.00 | \$25.00 | \$6,500.00 |
| 16. | 6-INCH PVC, SCHEDULE 40 (BLUE), INCLUDES BENDS, FITTINGS, AND CEMENT STABILIZED SAND AT ALL PAVEMENT CROSSINGS, COMPLETE IN PLACE | LF | 36 | \$40.00 | \$1,440.00 | \$41.00 | \$1,476.00 | \$40.00 | \$1,440.00 | \$30.00 | \$1,080.00 |
| 17. | CONTRACTOR TO PROVIDE AS BUILT SURVEY AT THE END OF CONSTRUCTION SHOWING ELEVATIONS OF THE TOP OF CURB AT HIGH POINTS, LOW POINTS, KNUCKLES, AND INTERSECTIONS, BUILDING LINE, BACK OF LOT AND SIGNIFICANT GRADE BREAKS (IF THE LOTS ARE NOT BUILT ACCORDING TO THE GRADING PLAN, THEY WILL BE REGRADED AT NO SEPARATE PAY), AS DIRECTED BY THE ENGINEER, COMPLETE IN PLACE | LS | 1 | \$4,000.00 | \$4,000.00 | \$4,350.00 | \$4,350.00 | \$10,000.00 | \$10,000.00 | \$4,000.00 | \$4,000.00 |
| SUBTOTAL PAVING IMPROVEMENT ITEMS | | | | | \$876,445.75 | | \$886,125.00 | | \$924,140.13 | | \$949,359.55 |

BID TABULATION FOR:

**CONSTRUCTION OF THE PAVING AND APPURTENANCES
TO SERVE LAKESIDE BAYOU SECTION 4
GALVESTON COUNTY MUNICIPAL UTILITY DISTRICT NO. 53
CITY OF TEXAS CITY, GALVESTON COUNTY, TEXAS
MAY 14, 2026
LJA ENGINEERING, INC.
S. YOUNG
MAY 14, 2026
7856-2914 (9.2)**

**BID OPENING DATE:
BID OPENING LOCATION:
TABULATION BY:
TABULATION DATE:
LJA JOB NO.**

| NO. | ITEM DESCRIPTION | UNIT | QTY | 1) DURWOOD GREENE CONSTRUCTION CO. | | 2) BEYER CONSTRUCTION, LLC | | 3) DECROSTA CONSTRUCTION | | 4) HARRIS CONSTRUCTION COMPANY, LLC | | |
|-------------------------------------|---|------|-----|------------------------------------|---------------------|----------------------------|---------------------|--------------------------|---------------------|-------------------------------------|---------------------|--|
| | | | | UNIT COST | TOTAL | UNIT COST | TOTAL | UNIT COST | TOTAL | UNIT COST | TOTAL | |
| MISCELLANEOUS ITEMS | | | | | | | | | | | | |
| 1. | INSTALL, MAINTAIN, AND REMOVE STABILIZED CONSTRUCTION EXIT, AND REGRADE AREA TO MATCH FINISHED GRADE. COMPLETE IN PLACE | EA | 2 | \$500.00 | \$1,000.00 | \$2,600.00 | \$5,200.00 | \$1,500.00 | \$3,000.00 | \$2,500.00 | \$5,000.00 | |
| 2. | STORM WATER POLLUTION PREVENTION PLAN COMPLIANCE, INCLUDES GENERAL SOURCE CONTROLS AND ALL ITEMS NOT SPECIFICALLY LISTED IN THE BID PROPOSAL, COMPLETE IN PLACE | LS | 1 | \$1,500.00 | \$1,500.00 | \$5,900.00 | \$5,900.00 | \$1,000.00 | \$1,000.00 | \$1,200.00 | \$1,200.00 | |
| 3. | PERMANENT TRAFFIC CONTROL DEVICES, INCLUDES ALL TRAFFIC BUTTONS, PAVEMENT STRIPING, MARKERS, REFLECTIVE PAINT ON MEDIAN NOSES, STREET SIGNS, TRAFFIC SIGNS, ETC., COMPLETE IN PLACE | LS | 1 | \$100.00 | \$100.00 | \$100.00 | \$100.00 | \$3,500.00 | \$3,500.00 | \$4,000.00 | \$4,000.00 | |
| 4. | INSTALL, MAINTAIN, AND REMOVE CONCRETE TRUCK WASHOUT AREA, COMPLETE IN PLACE | EA | 1 | \$1,500.00 | \$1,500.00 | \$1,500.00 | \$1,500.00 | \$2,000.00 | \$2,000.00 | \$1,000.00 | \$1,000.00 | |
| 5. | 18" CONCRETE RIP RAP ON EXISTING CHANNEL SIDE SLOPE, INCLUDES GEOTEXTILE FABRIC, AS SHOWN ON PLANS, COMPLETE IN PLACE | SY | 16 | \$200.00 | \$3,200.00 | \$178.00 | \$2,848.00 | \$150.00 | \$2,400.00 | \$180.00 | \$2,880.00 | |
| 6. | REGRADE EXISTING BACK OF LOT SWALE, AS DIRECTED BY ENGINEER, COMPLETE IN PLACE | LF | 677 | \$3.00 | \$2,031.00 | \$4.60 | \$3,114.20 | \$6.00 | \$4,062.00 | \$3.00 | \$2,031.00 | |
| SUBTOTAL MISCELLANEOUS ITEMS | | | | | \$9,331.00 | | \$18,662.20 | | \$15,962.00 | | \$16,111.00 | |
| BID SUMMARY | | | | | | | | | | | | |
| PAVING IMPROVEMENT ITEMS | | | | | \$876,445.75 | | \$886,125.00 | | \$924,140.13 | | \$949,359.55 | |
| MISCELLANEOUS ITEMS | | | | | \$9,331.00 | | \$18,662.20 | | \$15,962.00 | | \$16,111.00 | |
| TOTAL AMOUNT BASE BID | | | | | \$885,776.75 | | \$904,787.20 | | \$940,102.13 | | \$965,470.55 | |

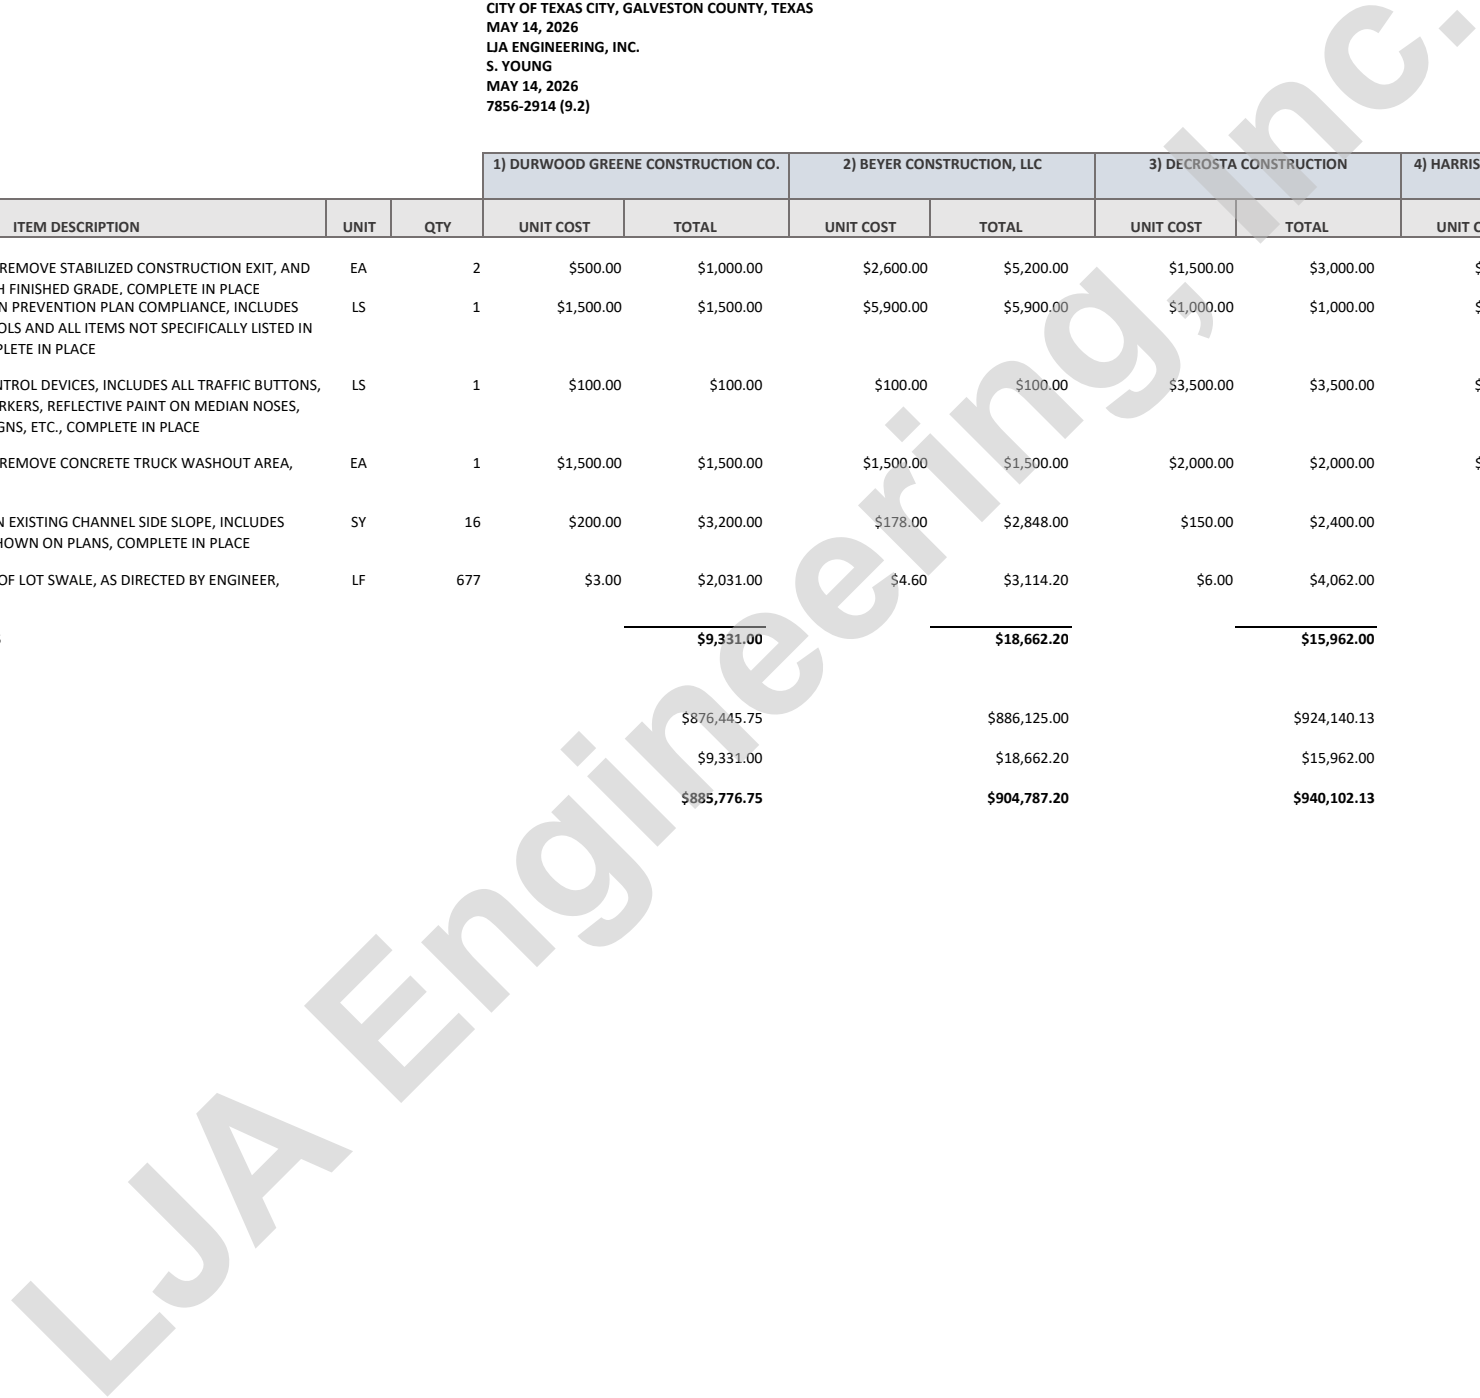

BID TABULATION FOR:

**CONSTRUCTION OF THE PAVING AND APPURTENANCES
TO SERVE LAKESIDE BAYOU SECTION 4
GALVESTON COUNTY MUNICIPAL UTILITY DISTRICT NO. 53
CITY OF TEXAS CITY, GALVESTON COUNTY, TEXAS
MAY 14, 2026
LJA ENGINEERING, INC.
S. YOUNG
MAY 14, 2026
7856-2914 (9.2)**

**BID OPENING DATE:
BID OPENING LOCATION:
TABULATION BY:
TABULATION DATE:
LJA JOB NO.**

| NO. | ITEM DESCRIPTION | UNIT | QTY | 5) R CONSTRUCTION CIVIL, LLC | | 6) GMR TOTAL SERVICES, LLC | | 7) HCG | | 8) PRECISE SERVICES INC. | |
|--|---|------|-------|------------------------------|---------------------|----------------------------|---------------------|------------|---------------------|--------------------------|-----------------------|
| | | | | UNIT COST | TOTAL | UNIT COST | TOTAL | UNIT COST | TOTAL | UNIT COST | TOTAL |
| PAVING IMPROVEMENT ITEMS | | | | | | | | | | | |
| 1. | ROADWAY EXCAVATION TO BE USED FOR FILL TO FINAL GRADE WITHIN THE PROJECT LIMITS, INCLUDES STRIPPING, STOCKPILING STRIPPINGS, PLACEMENT AND COMPACTION TO 95% STANDARD PROCTOR DENSITY, WITH MAXIMUM 8" LIFTS, AND RE-APPLICATION OF STRIPPINGS, COMPLETE IN PLACE | CY | 4637 | \$3.75 | \$17,388.75 | \$4.40 | \$20,402.80 | \$4.45 | \$20,634.65 | \$7.50 | \$34,777.50 |
| 2. | 8" LIME STABILIZED SUBGRADE MANIPULATION, COMPLETE IN PLACE | SY | 13910 | \$5.50 | \$76,505.00 | \$3.70 | \$51,467.00 | \$4.70 | \$65,377.00 | \$5.00 | \$69,550.00 |
| 3. | HYDRATED LIME FOR 8" STABILIZED SUBGRADE PREPARATION, 8% BY DRY WEIGHT, AS REQUIRED BY SOIL CONDITIONS AND APPROVED BY GEOTECHNICAL ENGINEER, COMPLETE IN PLACE | TON | 368 | \$350.00 | \$128,800.00 | \$380.00 | \$139,840.00 | \$366.75 | \$134,964.00 | \$330.00 | \$121,440.00 |
| 4. | 6" REINFORCED CONCRETE PAVEMENT, COMPLETE IN PLACE | SY | 12413 | \$51.50 | \$639,269.50 | \$52.50 | \$651,682.50 | \$47.90 | \$594,582.70 | \$54.55 | \$677,129.15 |
| 5. | 6" REINFORCED CONCRETE CURB, COMPLETE IN PLACE | LF | 2385 | \$4.00 | \$9,540.00 | \$4.10 | \$9,778.50 | \$4.00 | \$9,540.00 | \$5.00 | \$11,925.00 |
| 6. | 4" X 12" REINFORCED CONCRETE CURB, COMPLETE IN PLACE | LF | 4198 | \$4.00 | \$16,792.00 | \$4.10 | \$17,211.80 | \$4.00 | \$16,792.00 | \$5.00 | \$20,990.00 |
| 7. | STOP SIGNS WITH STREET NAMES, COMPLETE IN PLACE | EA | 7 | \$700.00 | \$4,900.00 | \$806.00 | \$5,642.00 | \$740.00 | \$5,180.00 | \$775.00 | \$5,425.00 |
| 8. | CONNECT PROPOSED 6" REINFORCED CONCRETE PAVEMENT TO EXISTING REINFORCED CONCRETE PAVEMENT, COMPLETE IN PLACE | LF | 56 | \$45.00 | \$2,520.00 | \$53.00 | \$2,968.00 | \$705.00 | \$39,480.00 | \$45.00 | \$2,520.00 |
| 9. | REINFORCED CONCRETE PAVING HEADER, COMPLETE IN PLACE | LF | 90 | \$28.00 | \$2,520.00 | \$20.00 | \$1,800.00 | \$27.00 | \$2,430.00 | \$25.00 | \$2,250.00 |
| 10. | TYPE III BARRICADE, COMPLETE IN PLACE | EA | 3 | \$1,300.00 | \$3,900.00 | \$1,600.00 | \$4,800.00 | \$1,400.00 | \$4,200.00 | \$1,275.00 | \$3,825.00 |
| 11. | REMOVE AND OFFSITE DISPOSAL OF EXISTING TYPE III BARRICADE, COMPLETE IN PLACE | EA | 2 | \$1.00 | \$2.00 | \$230.00 | \$460.00 | \$744.00 | \$1,488.00 | \$100.00 | \$200.00 |
| 12. | FINAL LOT AND RESERVE GRADING, COMPLETE IN PLACE | EA | 96 | \$185.00 | \$17,760.00 | \$177.00 | \$16,992.00 | \$298.00 | \$28,608.00 | \$215.00 | \$20,640.00 |
| 13. | ADA RAMPS, INCLUDES TRUNCATED DOME PAVERS WITH CONTRASTING COLOR PER DETAIL, COMPLETE IN PLACE | EA | 14 | \$1,800.00 | \$25,200.00 | \$1,800.00 | \$25,200.00 | \$1,880.00 | \$26,320.00 | \$1,300.00 | \$18,200.00 |
| 14. | 4" SQUARE DOUBLE REFLECTORIZED BLUE TRAFFIC BUTTONS FOR FIRE HYDRANT LOCATION, COMPLETE IN PLACE | EA | 7 | \$16.00 | \$112.00 | \$12.00 | \$84.00 | \$16.50 | \$115.50 | \$20.00 | \$140.00 |
| 15. | DOUBLE 3-INCH PVC ELECTRICAL CONDUIT, SCHEDULE 40 (GRAY), INCLUDES BENDS, FITTINGS, AND CEMENT STABILIZED SAND AT ALL PAVEMENT CROSSINGS, COMPLETE IN PLACE | LF | 260 | \$27.00 | \$7,020.00 | \$50.00 | \$13,000.00 | \$55.50 | \$14,430.00 | \$50.00 | \$13,000.00 |
| 16. | 6-INCH PVC, SCHEDULE 40 (BLUE), INCLUDES BENDS, FITTINGS, AND CEMENT STABILIZED SAND AT ALL PAVEMENT CROSSINGS, COMPLETE IN PLACE | LF | 36 | \$40.00 | \$1,440.00 | \$45.00 | \$1,620.00 | \$55.50 | \$1,998.00 | \$45.00 | \$1,620.00 |
| 17. | CONTRACTOR TO PROVIDE AS BUILT SURVEY AT THE END OF CONSTRUCTION SHOWING ELEVATIONS OF THE TOP OF CURB AT HIGH POINTS, LOW POINTS, KNUCKLES, AND INTERSECTIONS, BUILDING LINE, BACK OF LOT AND SIGNIFICANT GRADE BREAKS (IF THE LOTS ARE NOT BUILT ACCORDING TO THE GRADING PLAN, THEY WILL BE REGRADED AT NO SEPARATE PAY), AS DIRECTED BY THE ENGINEER, COMPLETE IN PLACE | LS | 1 | \$6,500.00 | \$6,500.00 | \$5,100.00 | \$5,100.00 | \$7,220.00 | \$7,220.00 | \$9,562.85 | \$9,562.85 |
| SUBTOTAL PAVING IMPROVEMENT ITEMS | | | | | \$960,169.25 | | \$968,048.60 | | \$973,359.85 | | \$1,013,194.50 |

BID TABULATION FOR:

**CONSTRUCTION OF THE PAVING AND APPURTENANCES
TO SERVE LAKESIDE BAYOU SECTION 4
GALVESTON COUNTY MUNICIPAL UTILITY DISTRICT NO. 53
CITY OF TEXAS CITY, GALVESTON COUNTY, TEXAS
MAY 14, 2026
LJA ENGINEERING, INC.
S. YOUNG
MAY 14, 2026
7856-2914 (9.2)**

**BID OPENING DATE:
BID OPENING LOCATION:
TABULATION BY:
TABULATION DATE:
LJA JOB NO.**

| NO. | ITEM DESCRIPTION | UNIT | QTY | 5) R CONSTRUCTION CIVIL, LLC | | 6) GMR TOTAL SERVICES, LLC | | 7) HCG | | 8) PRECISE SERVICES INC. | | |
|-------------------------------------|---|------|-----|------------------------------|---------------------|----------------------------|---------------------|------------|---------------------|--------------------------|-----------------------|--|
| | | | | UNIT COST | TOTAL | UNIT COST | TOTAL | UNIT COST | TOTAL | UNIT COST | TOTAL | |
| MISCELLANEOUS ITEMS | | | | | | | | | | | | |
| 1. | INSTALL, MAINTAIN, AND REMOVE STABILIZED CONSTRUCTION EXIT, AND REGRADE AREA TO MATCH FINISHED GRADE. COMPLETE IN PLACE | EA | 2 | \$1,500.00 | \$3,000.00 | \$1,600.00 | \$3,200.00 | \$1,860.00 | \$3,720.00 | \$1,000.00 | \$2,000.00 | |
| 2. | STORM WATER POLLUTION PREVENTION PLAN COMPLIANCE, INCLUDES GENERAL SOURCE CONTROLS AND ALL ITEMS NOT SPECIFICALLY LISTED IN THE BID PROPOSAL, COMPLETE IN PLACE | LS | 1 | \$1,200.00 | \$1,200.00 | \$806.00 | \$806.00 | \$1,990.00 | \$1,990.00 | \$1,000.00 | \$1,000.00 | |
| 3. | PERMANENT TRAFFIC CONTROL DEVICES, INCLUDES ALL TRAFFIC BUTTONS, PAVEMENT STRIPING, MARKERS, REFLECTIVE PAINT ON MEDIAN NOSES, STREET SIGNS, TRAFFIC SIGNS, ETC., COMPLETE IN PLACE | LS | 1 | \$2,600.00 | \$2,600.00 | \$2,800.00 | \$2,800.00 | \$2,655.00 | \$2,655.00 | \$2,000.00 | \$2,000.00 | |
| 4. | INSTALL, MAINTAIN, AND REMOVE CONCRETE TRUCK WASHOUT AREA, COMPLETE IN PLACE | EA | 1 | \$500.00 | \$500.00 | \$2,300.00 | \$2,300.00 | \$2,055.00 | \$2,055.00 | \$500.00 | \$500.00 | |
| 5. | 18" CONCRETE RIP RAP ON EXISTING CHANNEL SIDE SLOPE, INCLUDES GEOTEXTILE FABRIC, AS SHOWN ON PLANS, COMPLETE IN PLACE | SY | 16 | \$235.00 | \$3,760.00 | \$132.00 | \$2,112.00 | \$152.50 | \$2,440.00 | \$220.00 | \$3,520.00 | |
| 6. | REGRADE EXISTING BACK OF LOT SWALE, AS DIRECTED BY ENGINEER, COMPLETE IN PLACE | LF | 677 | \$3.00 | \$2,031.00 | \$6.00 | \$4,062.00 | \$8.95 | \$6,059.15 | \$11.50 | \$7,785.50 | |
| SUBTOTAL MISCELLANEOUS ITEMS | | | | | \$13,091.00 | | \$15,280.00 | | \$18,919.15 | | \$16,805.50 | |
| BID SUMMARY | | | | | | | | | | | | |
| PAVING IMPROVEMENT ITEMS | | | | | \$960,169.25 | | \$968,048.60 | | \$973,359.85 | | \$1,013,194.50 | |
| MISCELLANEOUS ITEMS | | | | | \$13,091.00 | | \$15,280.00 | | \$18,919.15 | | \$16,805.50 | |
| TOTAL AMOUNT BASE BID | | | | | \$973,260.25 | | \$983,328.60 | | \$992,279.00 | | \$1,030,000.00 | |

